

# Refraction Seismic Method


---

- Intercept times and apparent velocities;
- Critical and crossover distances;
- Hidden layers;
- Determination of the refractor velocity and depth;
- The case of dipping refractor
- Inversion methods:
  - ◆ “Plus-minus” method;
  - ◆ Generalized Reciprocal Method;
  - ◆ Travel-time continuation.
- Reading:
  - › Reynolds, Chapter 5
  - › Shearer, Chapter 4
  - › Telford *et al.*, Sections 4.7.9, 4.9

# Refraction Seismic Method

• Uses **travel times** of **refracted arrivals** to derive:

- 1) Depths to velocity contrasts (“**refractors**”);
- 2) Shapes of refracting boundaries;
- 3) Seismic velocities.

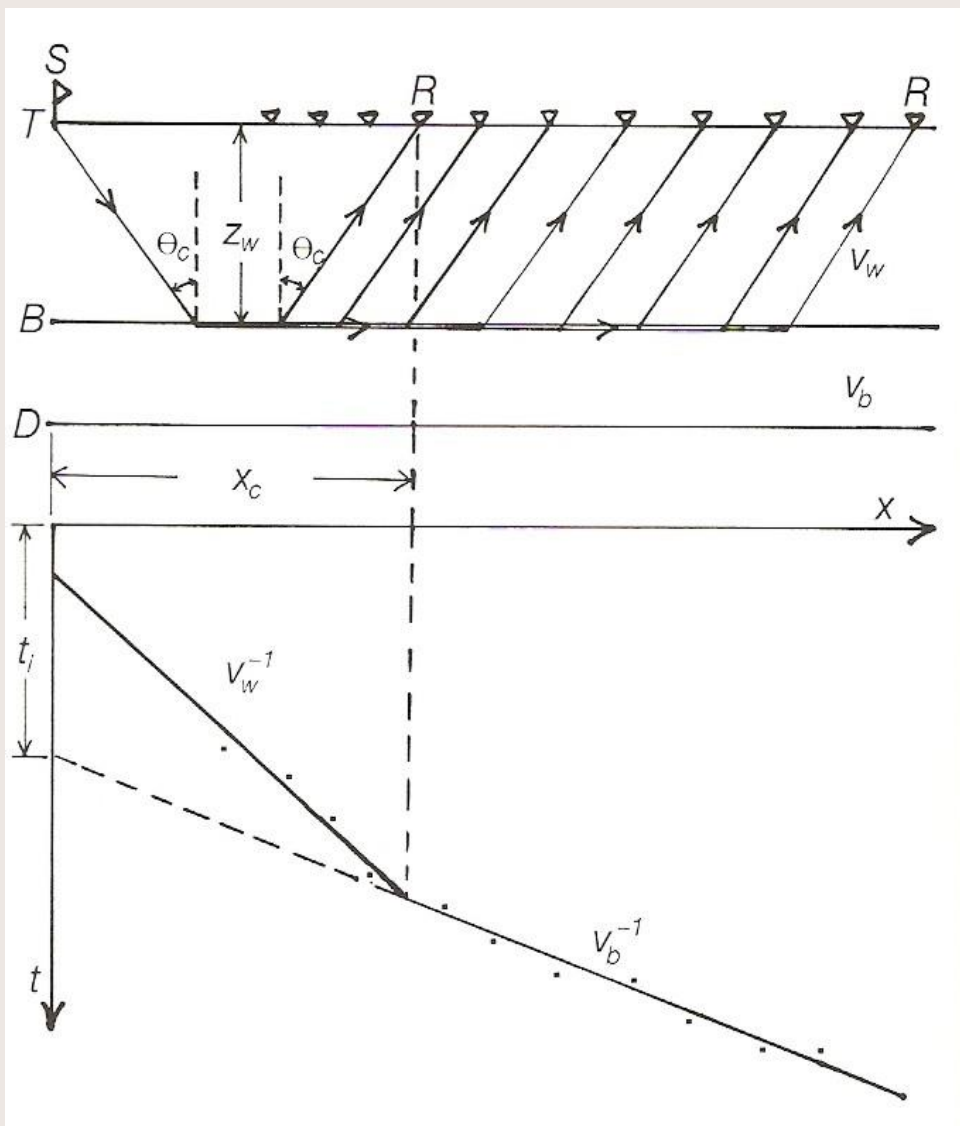

# Apparent Velocity

## Relation to wavefronts

- *Apparent velocity*,  $V_{app}$ , is the velocity at which the wavefront sweeps across the geophone spread.


- Because the wavefront also propagates upward,  $V_{app} \geq V_{true}$ :

$$AC = \frac{BC}{\sin \theta}$$

$$V_{app} = \frac{V}{\sin \theta}$$


- 2 extreme cases:

- $\theta = 0$ :  $V_{app} = \infty$ ;
- $\theta = 90^\circ$ :  $V_{app} = V_{true}$ .

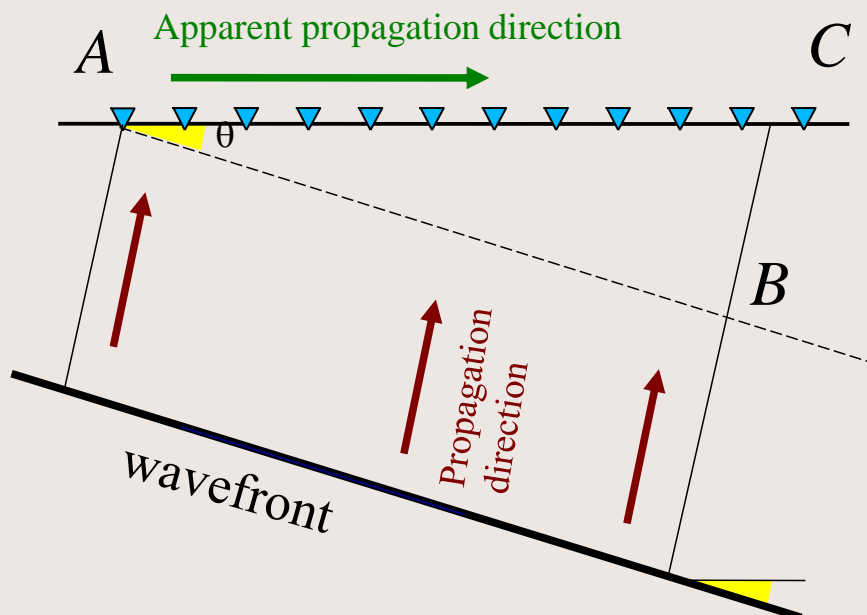


# Two-layer problem

(One reflection and one refraction)

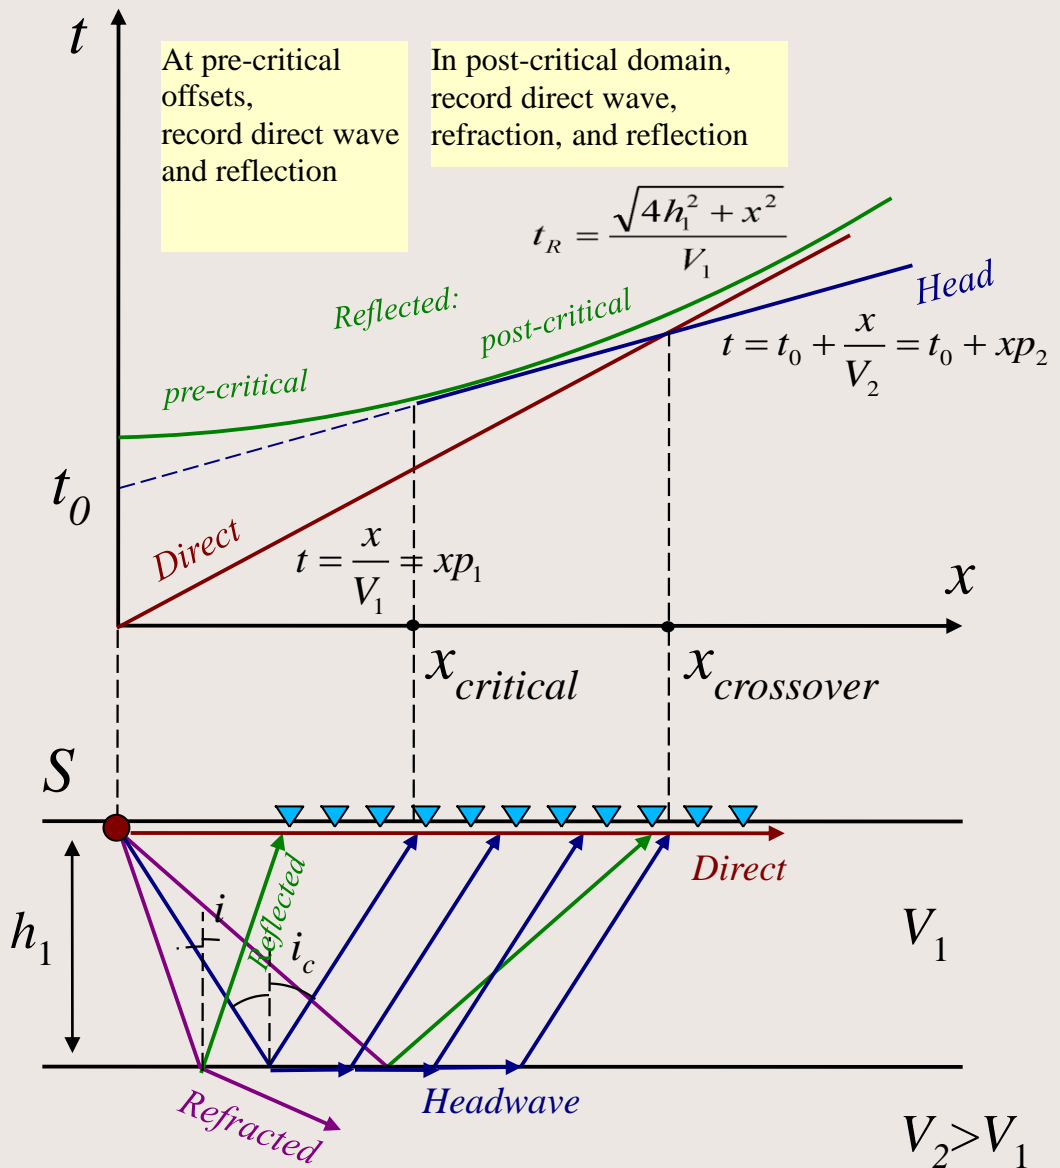

# Travel-time relations

Two horizontal layers

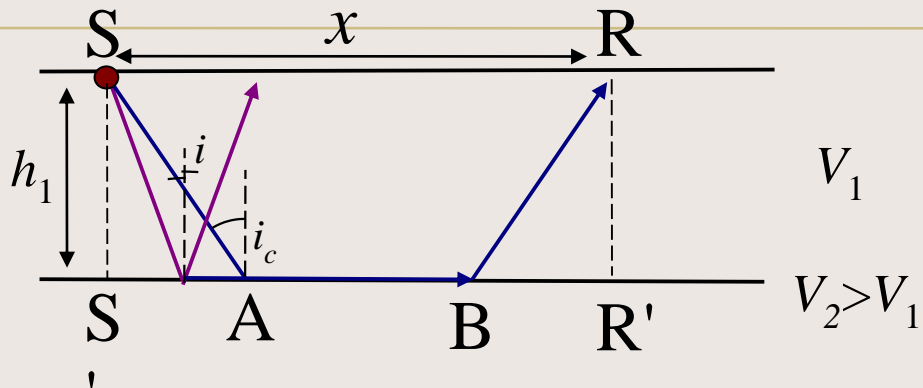

- For a head wave (“often called refraction”):

$$p = \frac{1}{V_2} \quad \sin i_c = pV_1 \quad \cos i_c = \sqrt{1 - (pV_1)^2}$$

$$t = 2 \frac{h_1}{V_1 \cos i_c} + p(x - 2h_1 \tan i_c) = t_0 + px$$

“linear moveout” term

$$t_0 = 2 \frac{h_1}{V_1 \cos i_c} (1 - pV_1 \sin i_c) = \frac{2h_1}{V_1} \cos i_c$$

intercept time

this also equals  $\sin i$

- For a reflection (we'll use this later):

$$pV_1 = \sin i$$


$$\tan i = \frac{x}{2h_1}$$

$$t = 2 \frac{\sqrt{h_1^2 + \left(\frac{x}{2}\right)^2}}{V_1} = \frac{\sqrt{4h_1^2 + x^2}}{V_1}$$

hyperbolic moveout”

here,  $p$  is variable and controlled by arbitrary angle  $i$

# Critical and cross-over distances

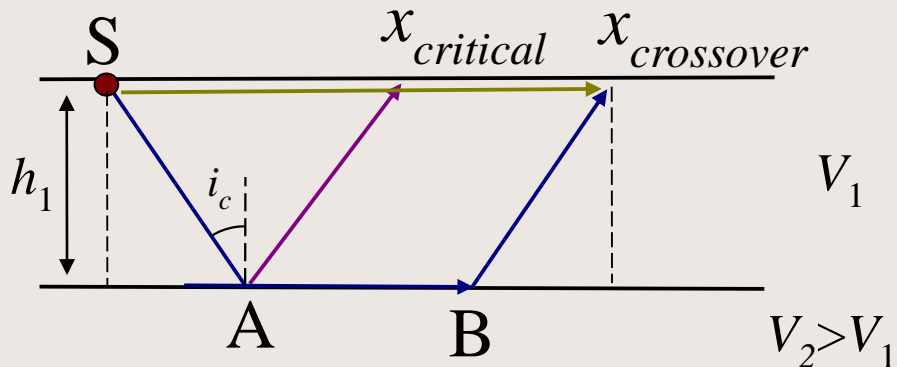

- Critical distance:

$$x_{critical} = 2h_1 \tan i_c = 2h_1 \frac{V_1 / V_2}{\sqrt{1 - (V_1 / V_2)^2}} = \frac{2h_1 V_1}{\sqrt{V_2^2 - V_1^2}}$$

- Cross-over distance:

$$t_{direct}(x_{crossover}) = t_{headwave}(x_{crossover})$$

$$\frac{x_{crossover}}{V_1} = t_0 + \frac{x_{crossover}}{V_2}$$

$$x_{crossover} = \frac{t_0}{(1/V_1 - 1/V_2)}$$

“slownesses”


# Multiple-layer case (Horizontal layering)

- $p$  is the same *critical ray parameter*;

$$p = \frac{1}{V_{\text{refractor}}}$$


- $t_0$  is accumulated across the layers:

$$t = \sum_{k=1}^n \frac{2h_k}{V_k} \cos i_k + px$$

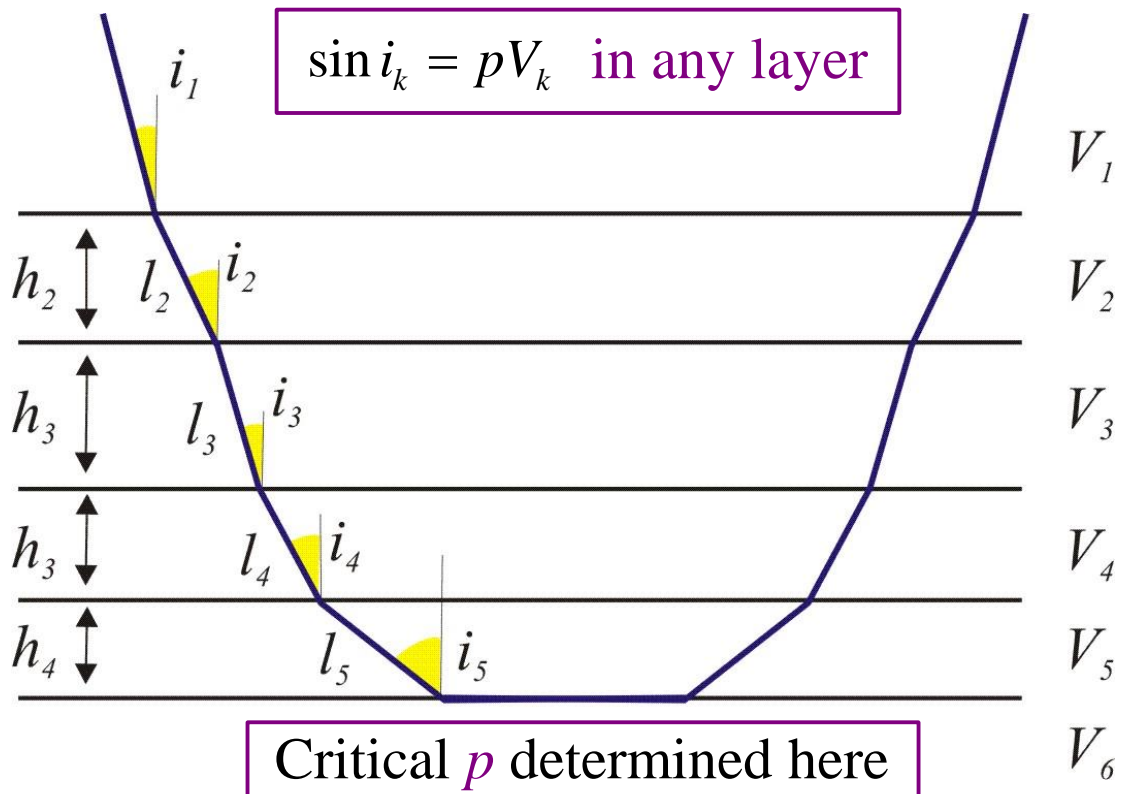

# Dipping Refractor Case

shooting down-dip

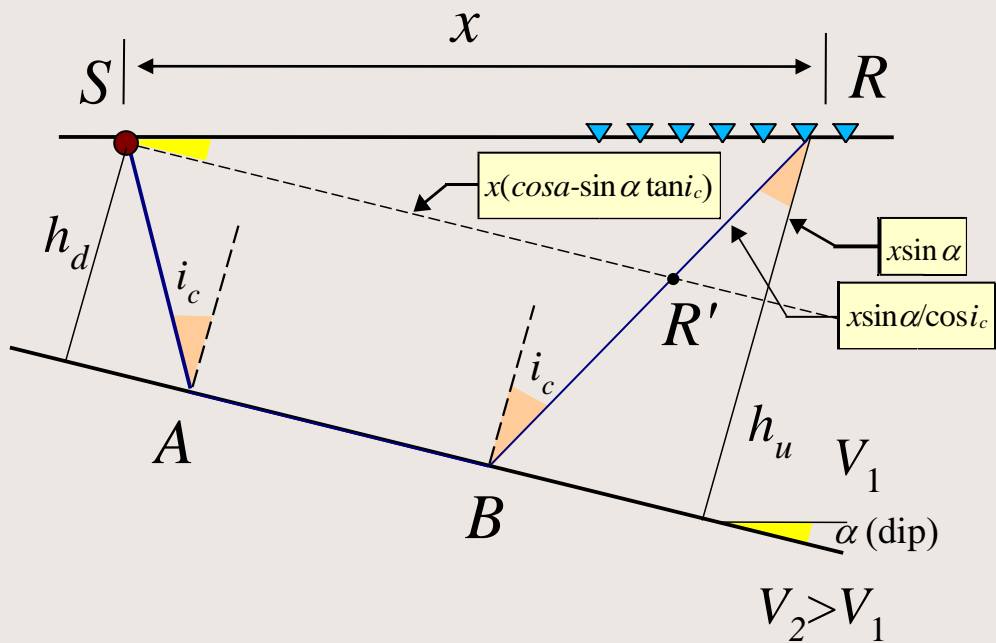

$$t = 2 \frac{h_d}{V_1} \cos i_c + \frac{1}{V_2} x (\cos \alpha - \sin \alpha \tan i_c) + \frac{1}{V_1} \frac{x \sin \alpha}{\cos i_c}$$

$$t = \frac{2h_d}{V_1} \cos i_c + \frac{x}{V_1 \cos i_c} \left[ \frac{V_1}{V_2} (\cos \alpha \cos i_c - \sin \alpha \sin i_c) + \sin \alpha \right]$$

$$t = \frac{2h_d}{V_1} \cos i_c + \frac{x}{V_1} (\cos \alpha \sin i_c + \sin \alpha \cos i_c)$$

$$t = \frac{2h_d}{V_1} \cos i_c + \frac{x}{V_1} \sin(i_c + \alpha)$$


would change to '-' for up-dip recording



# Refraction Interpretation

## Reversed travel times

- One needs *reversed* recording (in opposite directions) for resolution of dips.
- The *reciprocal times*,  $T_R$ , must be the the same for reversed shots.
- Dipping refractor is indicated by:
  - ♦ Different *apparent velocities* ( $=1/p$ , TTC slopes) in the two directions;
    - determine  $V_2$  and  $\alpha$  (refractor velocity and dip).
  - ♦ Different *intercept times*.
    - determine  $h_d$  and  $h_u$  (interface depths).

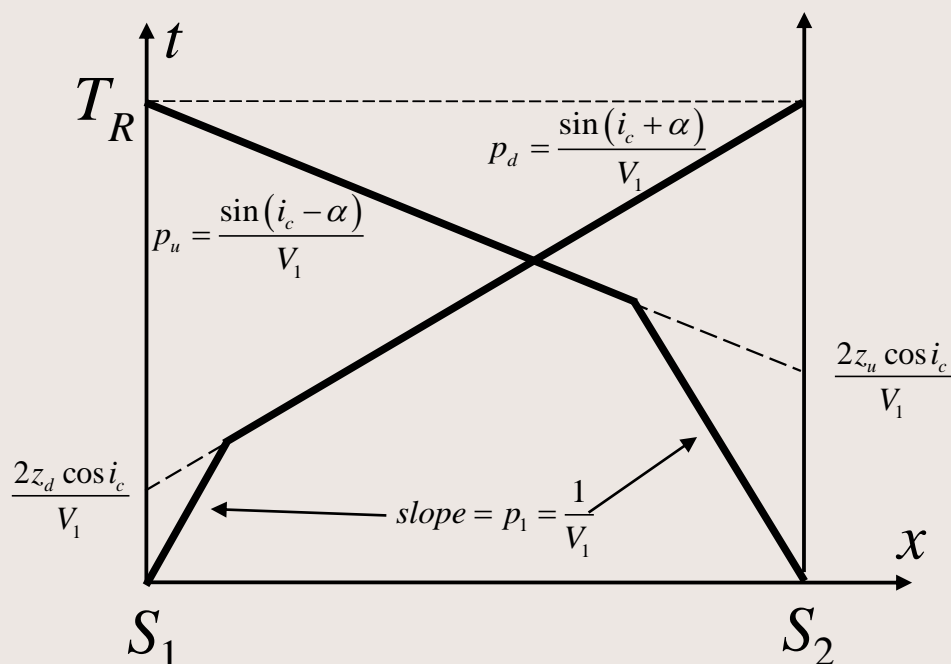

# Determination of Refractor Velocity and Dip

- *Apparent velocity* is  $V_{\text{app}} = 1/p$ , where  $p$  is the *ray parameter* (i.e., slope of the travel-time curve).
  - ♦ Apparent velocities are measured directly from the observed TTCs;
  - ♦  $V_{\text{app}} = V_{\text{refractor}}$  only in the case of a horizontal layering.
  - ♦ For a dipping refractor:
    - Down dip:  $V_d = \frac{V_1}{\sin(i_c + \alpha)}$  (*slower than*  $V_2$ );
    - Up-dip:  $V_u = \frac{V_1}{\sin(i_c - \alpha)}$  (*faster*).
- From the two reversed apparent velocities,  $i_c$  and  $\alpha$  are determined:

$$i_c + \alpha = \sin^{-1} \frac{V_1}{V_d} \qquad i_c - \alpha = \sin^{-1} \frac{V_1}{V_u}$$

$$i_c = \frac{1}{2} \left( \sin^{-1} \frac{V_1}{V_d} + \sin^{-1} \frac{V_1}{V_u} \right)$$

$$\alpha = \frac{1}{2} \left( \sin^{-1} \frac{V_1}{V_d} - \sin^{-1} \frac{V_1}{V_u} \right)$$

- From  $i_c$ , the refractor velocity is:


$$V_2 = \frac{V_1}{\sin i_c}$$

# Determination of Refractor Depth

- From the *intercept times*,  $t_d$  and  $t_u$ , *refractor depth* is determined:

$$h_d = \frac{V_1 t_d}{2 \cos i_c}$$

$$h_u = \frac{V_1 t_u}{2 \cos i_c}$$

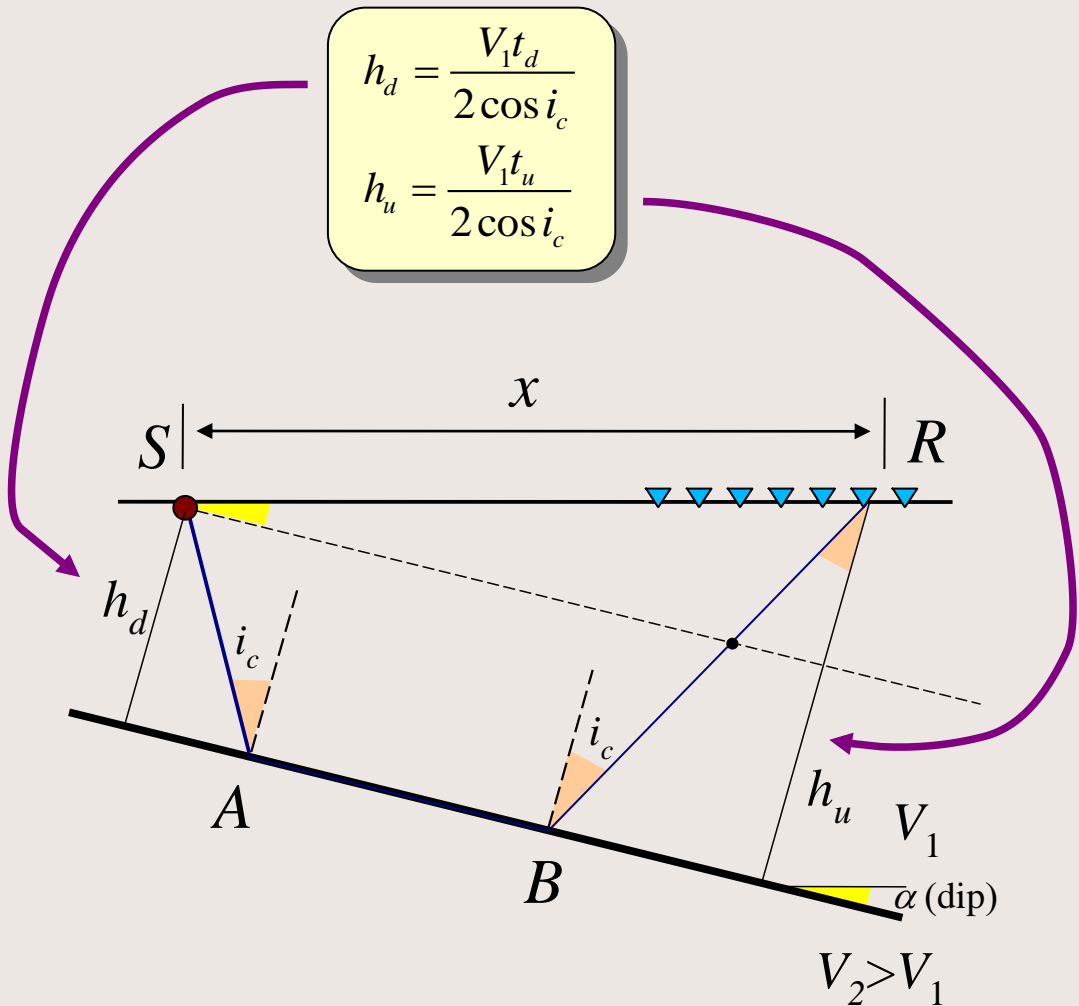

# Delay time

- Consider a nearly horizontal, shallow interface with strong velocity contrast (a typical case for **weathering layer**).

- In this case, we can separate the times associated with the source and receiver vicinities:  $t_{SR} = t_{SX} + t_{XR}$ .

- Relate the time  $t_{SX}$  to a time along the refractor,  $t_{BX}$ :


$$t_{SX} = t_{SA} - t_{BA} + t_{BX} = t_{S\ Delay} + x/V_2.$$

$$t_{S\ Delay} = \frac{SA}{V_1} - \frac{BA}{V_2} = \frac{h_s}{V_1 \cos i_c} - \frac{h_s \tan i_c}{V_2} = \frac{h_s}{V_1 \cos i_c} (1 - \sin^2 i_c) = \frac{h_s \cos i_c}{V_1}$$

Note that  $V_2 = V_1 / \sin i_c$

- Thus, source and receiver **delay times** are:

$$t_{S,R\ Delay} = \frac{h_{s,r} \cos i_c}{V_1} \quad \text{and} \quad t_{SR} = t_{S\ Delay} + t_{R\ Delay} + \frac{SR}{V_2}$$

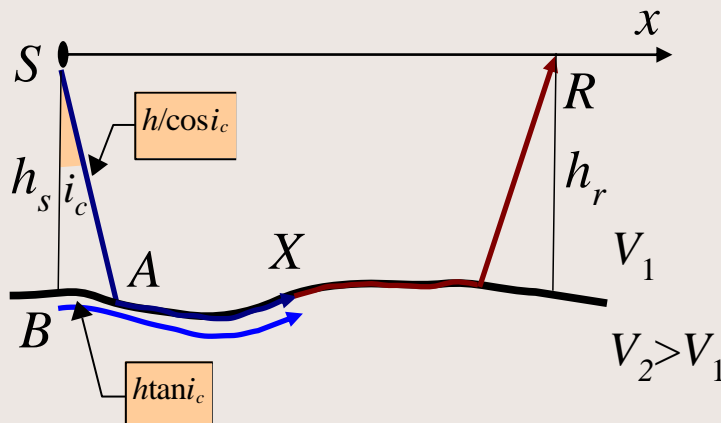


# Plus-Minus Method

(Weathering correction; Hagedoorn)

Assume that we have recorded two headwaves in opposite directions, and have estimated the velocity of overburden,  $V_1$ .

How can we map the refracting boundary?

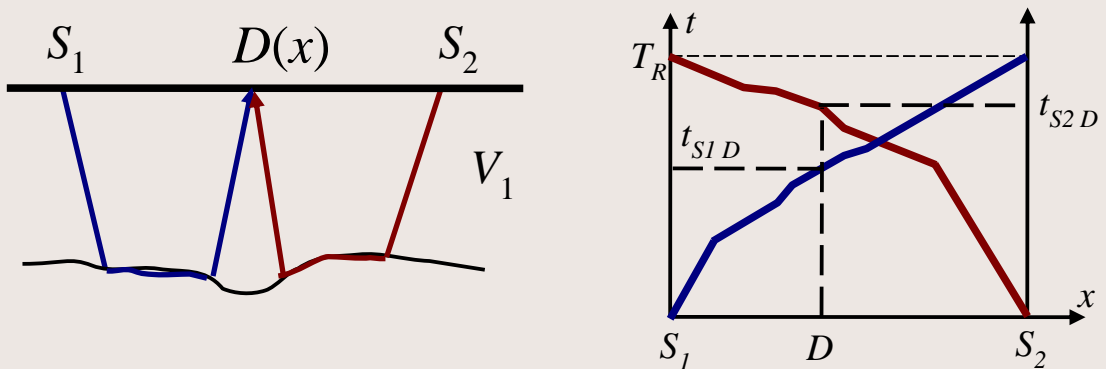

Solution:

- Profile  $S_1 \rightarrow S_2$ :  $t_{S_1D} = \frac{x}{V_2} + t_{S_1} + t_D$
- Profile  $S_2 \rightarrow S_1$ :  $t_{S_2D} = \frac{(S_1S_2 - x)}{V_2} + t_{S_2} + t_D$

Form PLUS travel-time:

$$t_{PLUS} = t_{S_1D} + t_{S_2D} = \frac{S_1S_2}{V_2} + t_{S_1} + t_{S_2} + 2t_D = t_{S_1S_2} + 2t_D$$

Hence:  $t_D = \frac{1}{2} (t_{PLUS} - t_{S_1S_2})$

To determine  $i_c$  (and depth), still need to find  $V_2$ .

# Plus-Minus Method (Continued)

- To determine  $V_2$ :



- Form MINUS travel-time:

$$t_{MINUS} = t_{S_1D} - t_{S_2D} = \frac{2x}{V_2} \left[ \frac{S_1 S_2}{V_2} + t_{S_1} - t_{S_2} \right]$$

this is a constant!



Hence:  $slope [t_{MINUS}(x)] = \frac{2}{V_2}$

- The slope is usually estimated by using the *Least Squares method*.
- Drawback of this method – averaging over the pre-critical region.

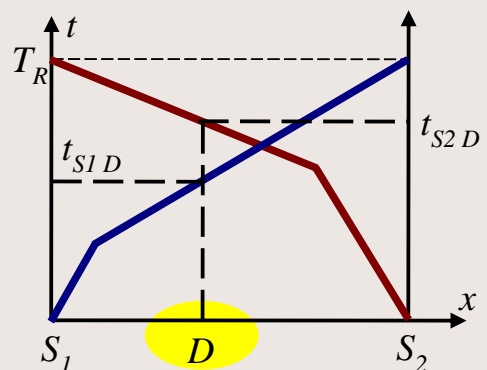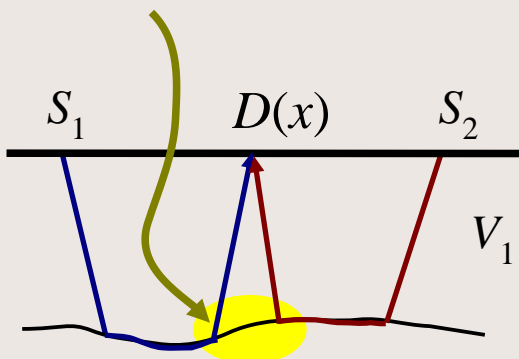

# Generalized Reciprocal Method (GRM)

- Introduces offsets ('XY') in travel-time readings in the forward and reverse shots;
  - ♦ so that the imaging is targeted on a compact interface region.
- Proceeds as the plus-minus method;
- Determines the 'optimal' XY:
  - 1) Corresponding to the most linear *velocity analysis function*;
  - 2) Corresponding to the *most detail* of the refractor.

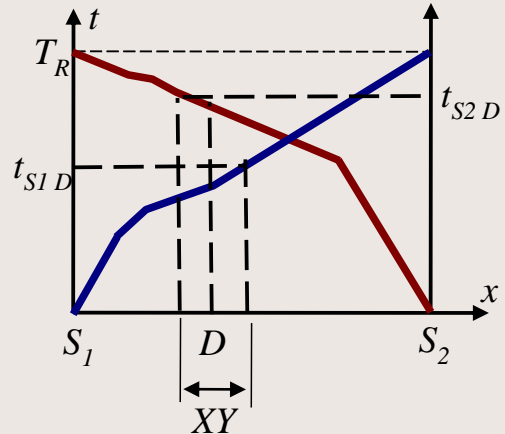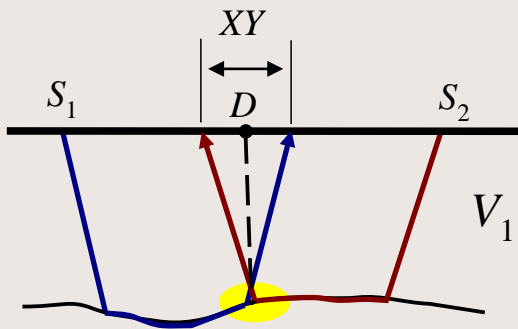

- The *velocity analysis function*:

$$t_V = \frac{1}{2} (t_{S_1D} - t_{S_2D} + t_{S_1S_2})$$

should be linear, slope =  $1/V_2$ ;

- The *time-depth function*:


$$t_D = \frac{1}{2} \left( t_{S_1D} + t_{S_2D} - t_{S_1S_2} - \frac{XY}{V_2} \right)$$

this is related to the desired depth:

$$h_D = \frac{t_D V_1 V_2}{\sqrt{V_2^2 - V_1^2}}$$

# Head-wave “migration” (travel-time continuation) method


- “Migration” refers to transforming the space-time picture (travel-time curves here) into a depth image (position of refractor).
- Refraction (head-wave) migration:
  - ◆ Using the observed travel times, draw the head-wave wavefronts in depth;
  - ◆ Identify the surface on which:
 
$$t_{forward}(x, z) + t_{reversed}(x, z) = T_R$$
  - ◆ This surface is the position of the refractor.

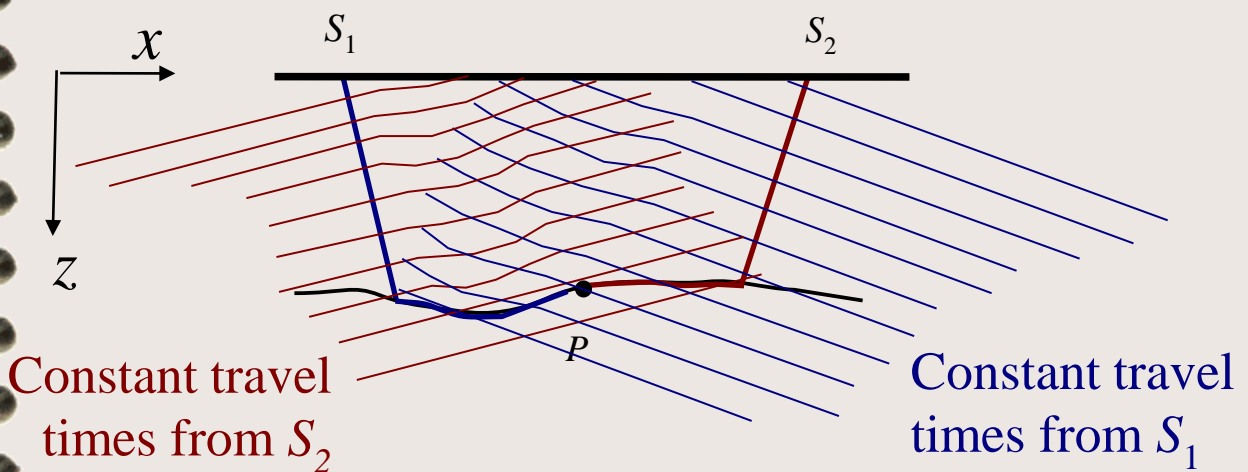



# Phantoming



- Refraction imaging methods work within the region sampled by head waves, that is, beyond critical distances from the shots;
- In order to extend this coverage to the shot points, *phantoming* can be used:
  - Head wave arrivals are extended using time-shifted picks from other shots;
  - *However*, this can be done only when horizontal structural variations are small.

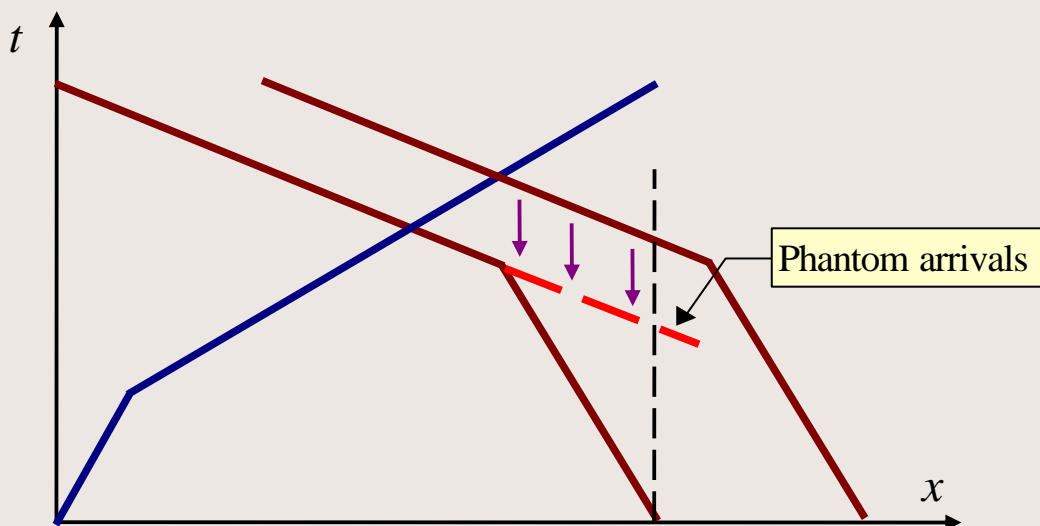



# The “Hidden-Layer” Problem

- Velocity contrasts *may not be visible* in refraction (first-arrival) travel times. Three typical cases:

◆ Low-velocity layers do not appear in first arrivals in principle:

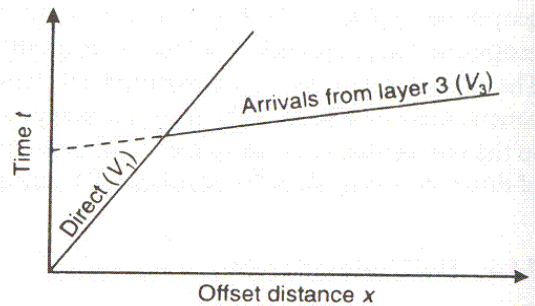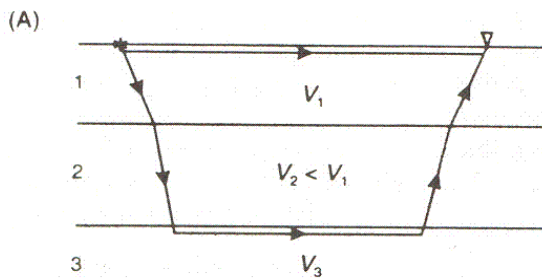

◆ Relatively thin layers on top of a strong velocity contrast;

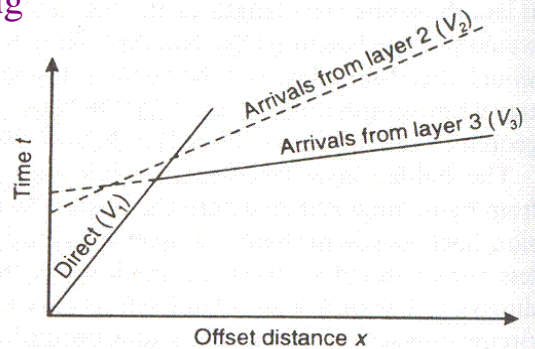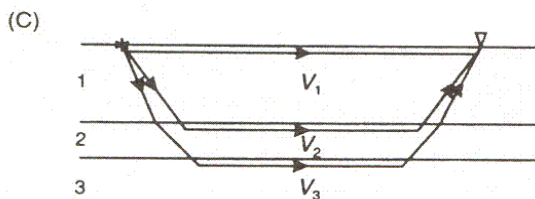

◆ Short travel-time branch may be missed when using sparse geophone coverage:

