

# Reflection Seismic Data Processing

---

- General CMP processing sequence
- Highlights of some key steps
- Reading:
  - › Sheriff and Geldart, Chapter 9

# Reflection Seismic Processing

---

- Objective - transform redundant reflection seismic records in the *time domain* into an interpretable *depth image*.
  - Data reduction and editing;
    - ◆ Transformation into conveniently computer-manageable form;
    - ◆ Removal of bad records;
  - Gathering;
    - ◆ CMP sorting;
  - Filtering in time and space;
    - ◆ Attenuation of noise;
  - Imaging
    - ◆ Final velocity and reflectivity image.

# Seismic Processing Systems

---

- Usually geared to a particular type of application
  - ◆ Mostly CMP reflection processing;
  - ◆ Land or marine, 2D or 3D.
- Commercial:
  - ◆ ProMAX (Landmark);
  - ◆ Omega (Western Geophysical, marine);
  - ◆ Echos (formerly Disco, Focus - Paradigm);
  - ◆ Vista (now CGG).
- Universities:
  - ◆ Stanford Exploration Project;
  - ◆ Seismic UNIX (Colorado School of Mines);
  - ◆ FreeUSP (Amoco);
  - ◆ SIOSEIS (Scripps, marine);
  - ◆ Our own (IGeoS)

# CMP Processing Sequence

---

- 1) Demultiplex, Vibroseis correlation, Gain recovery
  - ◆ Conversion from file formats produced by field data loggers into processing-oriented formats
    - SEG-Y, SEG-2.
    - ProMax, Focus, Omega, SU, Vista, etc., internal formats.
  - ◆ Often done in the field.
- 2) Field Geometry
  - ◆ Assignment of source-receiver coordinates, offsets, etc. in the *trace headers*.
- 3) Edit
  - ◆ Removal of bad traces (noisy channels, poorly planted geophones, channels contaminated by power line noise, etc.).

# CMP Processing sequence (continued)

- 4) First arrival picking
  - ◆ May be semi-automatic or manual;
  - ◆ Required for generation of *refraction statics*; models and for designing the *mutes*.
- 5) Elevation statics
  - ◆ Based on geometry information, compensates the travel-time variations caused by variations in source/receiver elevations.
  - ◆ Transforms the records as if recorded at a common horizontal *datum* surface.
- 6) Refraction statics
  - ◆ Builds a model for the shallow, low-velocity subsurface;
  - ◆ Compensates travel-time variations caused by the shallow velocities.
- 7) 'Top', 'bottom', and 'surgical' *mute*
  - ◆ Eliminates (sets amplitude=0) the time intervals where strong non-reflection energy is present:
    - ◆ First arrivals, ground roll, airwave.

# CMP Processing Sequence (continued)

## 8) Gain recovery

- ◆ Compensates geometrical spreading;
- ◆ Based on a simple heuristic relation.

## 9) Trace balance

- ◆ Equalizes the variations in amplitudes caused by differences in *coupling*;
- ◆ In true-amplitude processing, replaced with '*surface-consistent deconvolution*'.

## 10) Deconvolution or wavelet processing

- ◆ Compresses the wavelet in time, attenuates reverberations.
- ◆ Converts the wavelet to zero-phase for viewing

## 11) Gather, CMP sort

- ◆ Often (in ProMax, Omega, Vista) done by using *trace lookup* tables instead of creating additional copies of the dataset.

## 12) Moveout (Radon, $\tau$ - $p$ , $f$ - $k$ ) filtering

- ◆ Attenuates multiples, ground roll.



# Deconvolution

**New!**

Deconvolving (inverse) Filter

## Objectives:


- 1) Compress the wavelet into a sharp minimum- or zero-phase shape;
- 2) Remove predictable (short-period multiple) part of the signal;
- 3) Broaden (flatten) the spectrum.

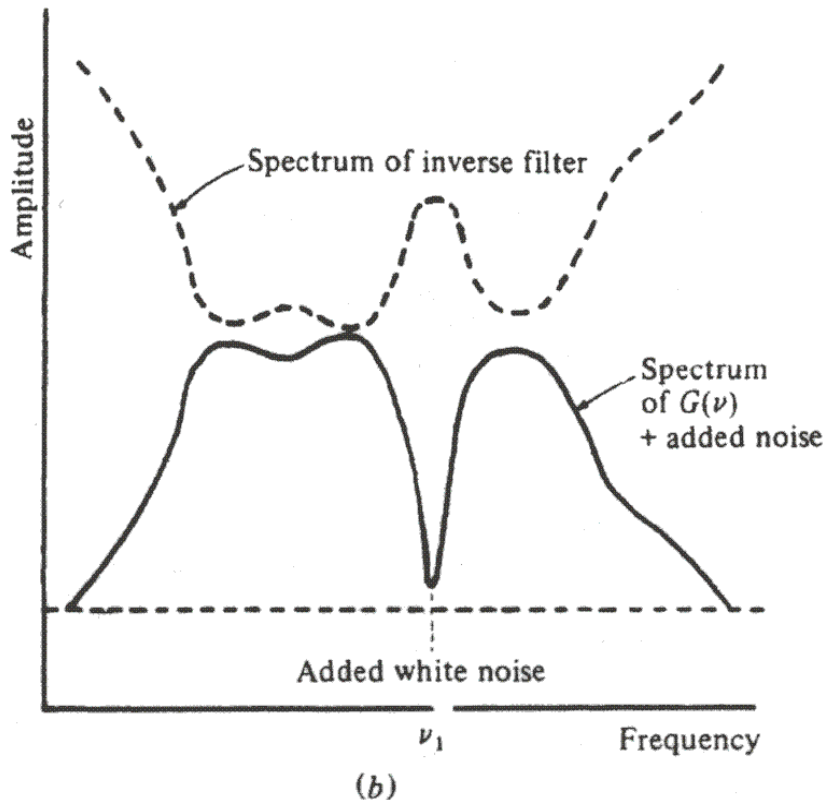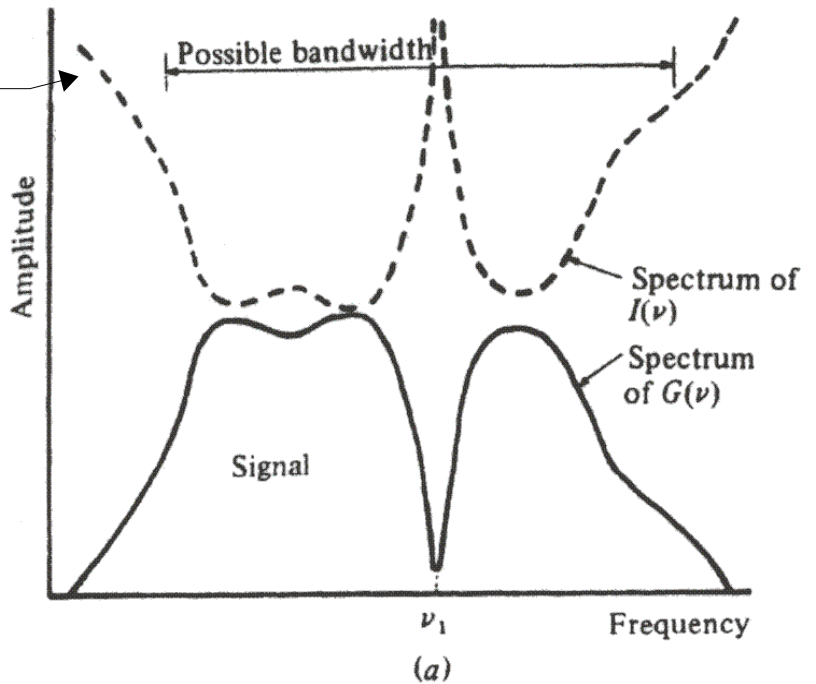


More on deconvolution in *Filtering* section later...

# Wavelet shaping

- Shape of the source wavelet is estimated from autocorrelation of the data
- Time-variant “spectral whitening” (flattening within an estimated bandwidth) is applied
- A filter is designed to convert the wavelet into **zero-phase**

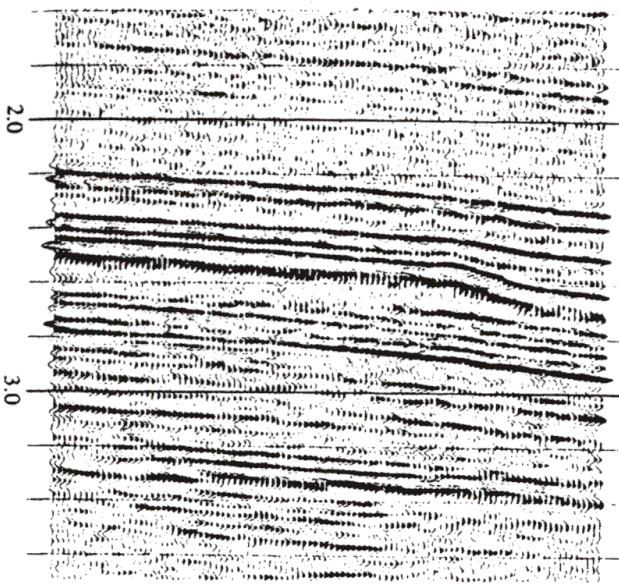

Migrated stack before wavelet processing

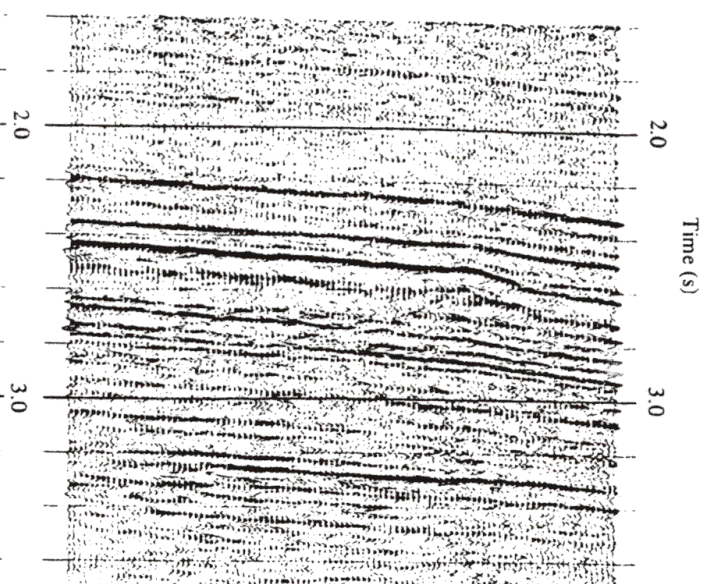

Migrated stack after wavelet processing



# CMP Processing Sequence (continued)

---

## 13) Velocity analysis

- ◆ For each of the CMP gathers, determines the optimal *stacking velocity*.

## 14) Dip Moveout (DMO) correction

- ◆ Transforms the records so that the subsequent NMO+stack work well even in the presence of dipping reflectors.

## 15) Normal Moveout (NMO) correction

- ◆ Removes the effects of source-receiver separation from reflection records;
- ◆ Transforms the records as if recorded at normal incidence.

## 16) Residual statics

- ◆ Removes the remaining small travel-time variations caused by inaccurate statics or velocity model

# Normal Moveout (NMO) correction


- NMO correction transforms a reflection record at offset  $x$  into a normal-incidence ( $x=0$ ) record:

$$t_0 = \sqrt{t^2(x) - \left(\frac{x}{V}\right)^2} \approx t(x) - \frac{1}{2t_0} \left(\frac{x}{V}\right)^2$$

“Stacking velocity”



NMO correction

- NMO correction stretches shallower and slower reflections stronger
  - This affects the spectrum of the stack
  - This distortion is controlled during processing by setting a limit in relative stretch (typically  $\sim 25\%$ )

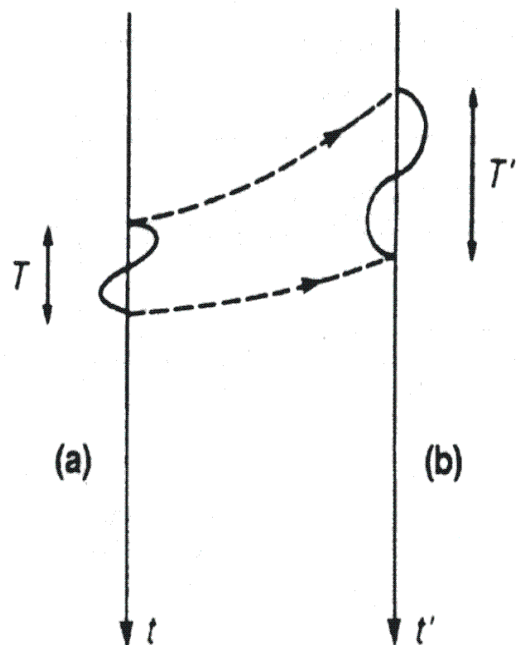

# Velocity Analysis


CMP gathers are stacked along trial-velocity hyperbolas and presented in time-velocity diagrams.

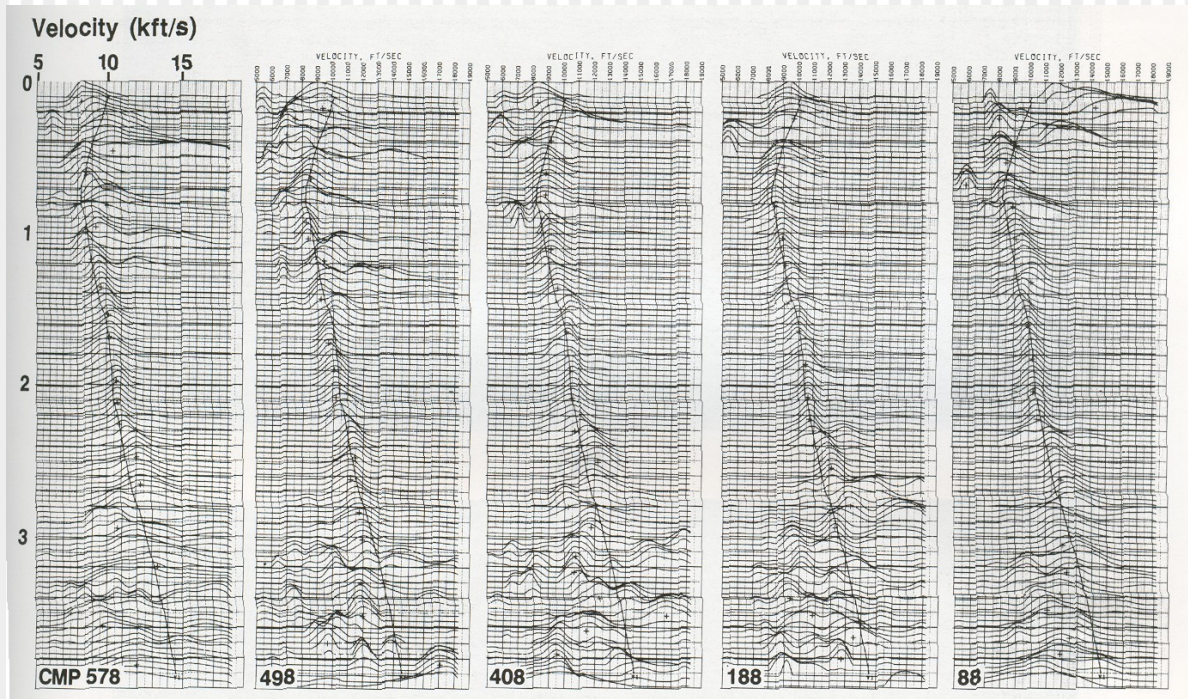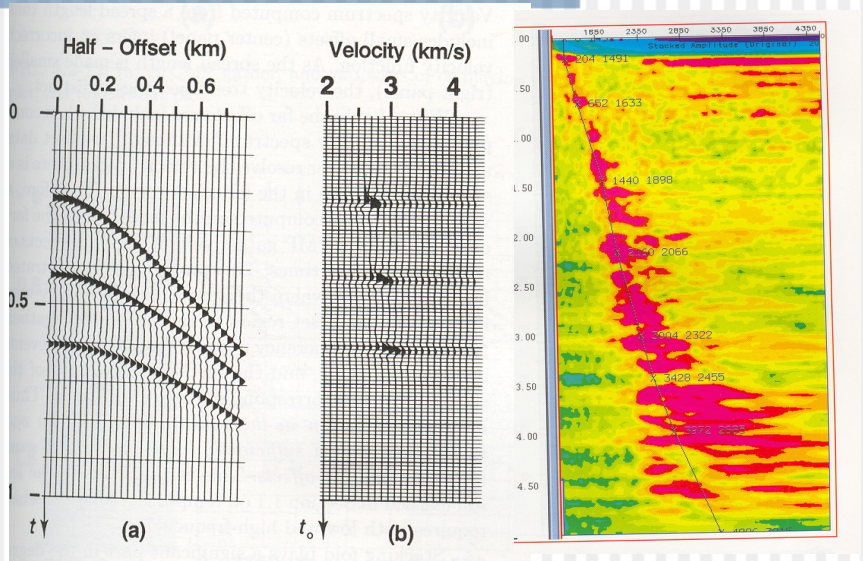

# Velocity analysis

## *(Common-Velocity Stacks)*


- Groups of CMP gathers are NMO-corrected (hyperbolas flattened) using a range of trial velocities and stacked.
- Velocities are picked at the amplitude peaks and best resolution in the stacks.

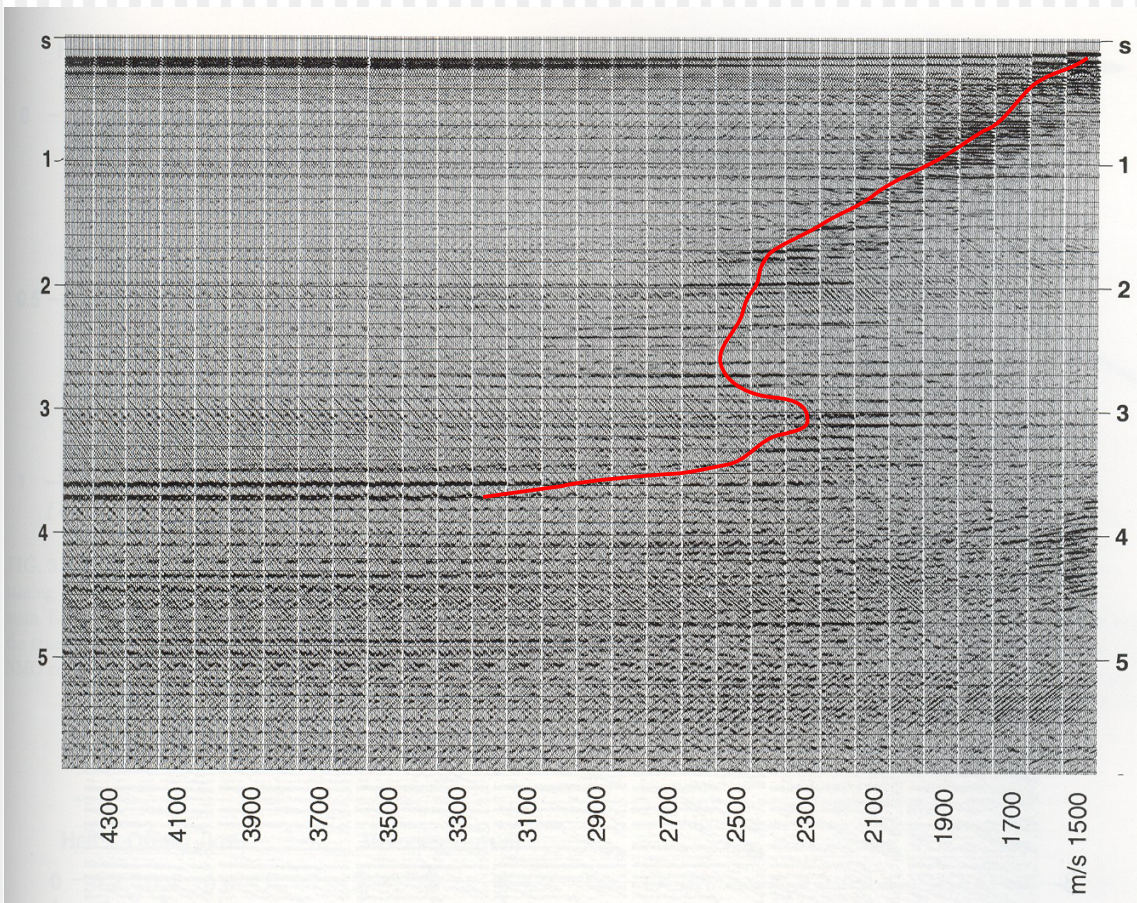

New!

# NMO → DMO → Migration

- DMO assists NMO by correcting for the time delay on an offset trace assuming zero dip.
- For a dipping reflector, DMO moves the data to the correct zero-offset trace. Migration further moves it to the subsurface location.

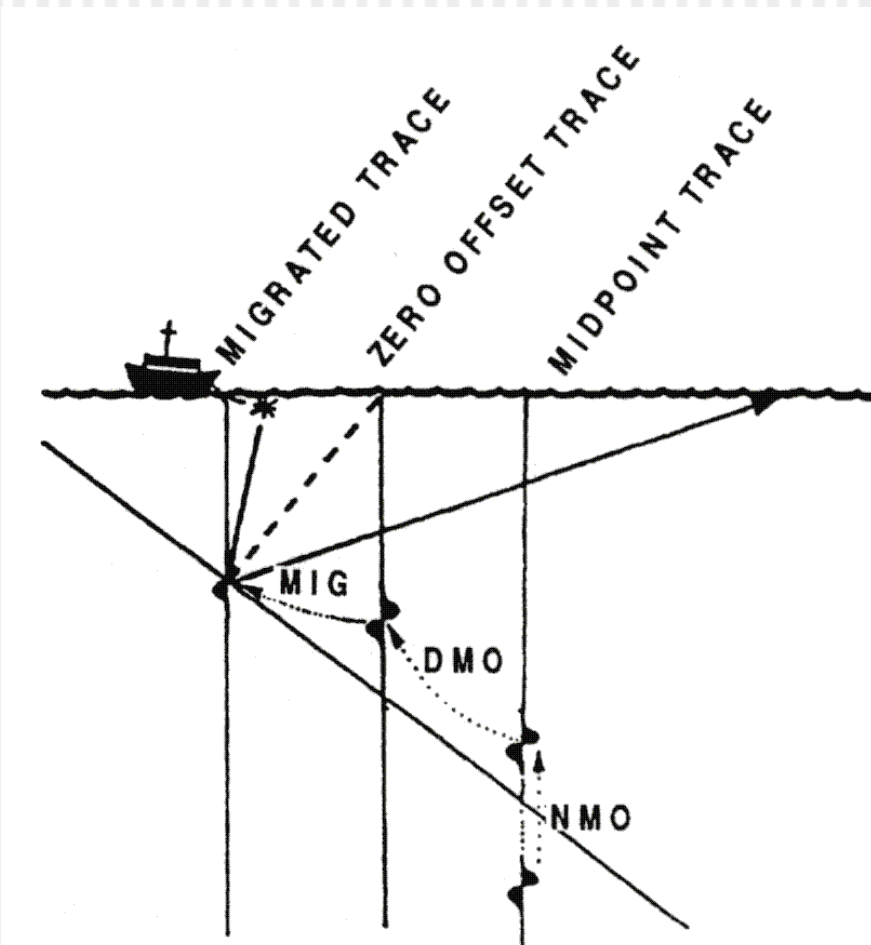*Deregowski, 1986*


# CMP Processing Sequence (continued)

- 17) Steps 13-16 above are usually iterated 3-5 times to produce accurate *velocity* and *residual statics* models.
  - ◆ Success of velocity analysis depends on the quality of DMO/NMO and residual statics, and vice versa.
- 18) CMP Stack
  - ◆ Produces a *zero-offset section*;
  - ◆ Utilizes CMP redundancy to increase the *Signal/Noise ratio*.
  - ◆ Can employ various normalization ideas, e.g., *diversity stack*
- 19) Migration
  - ◆ Transforms the zero-offset *time* section into a depth image;
  - ◆ Establishes correct extents and dips of the reflectors.
- 20) Frequency filtering and display
  - ◆ Attenuates noise
  - ◆ Provides best display for interpretation

New!


# Moveout ( $f-k$ , $\tau-p$ ) filtering

- Removes coherent events with undesired moveouts

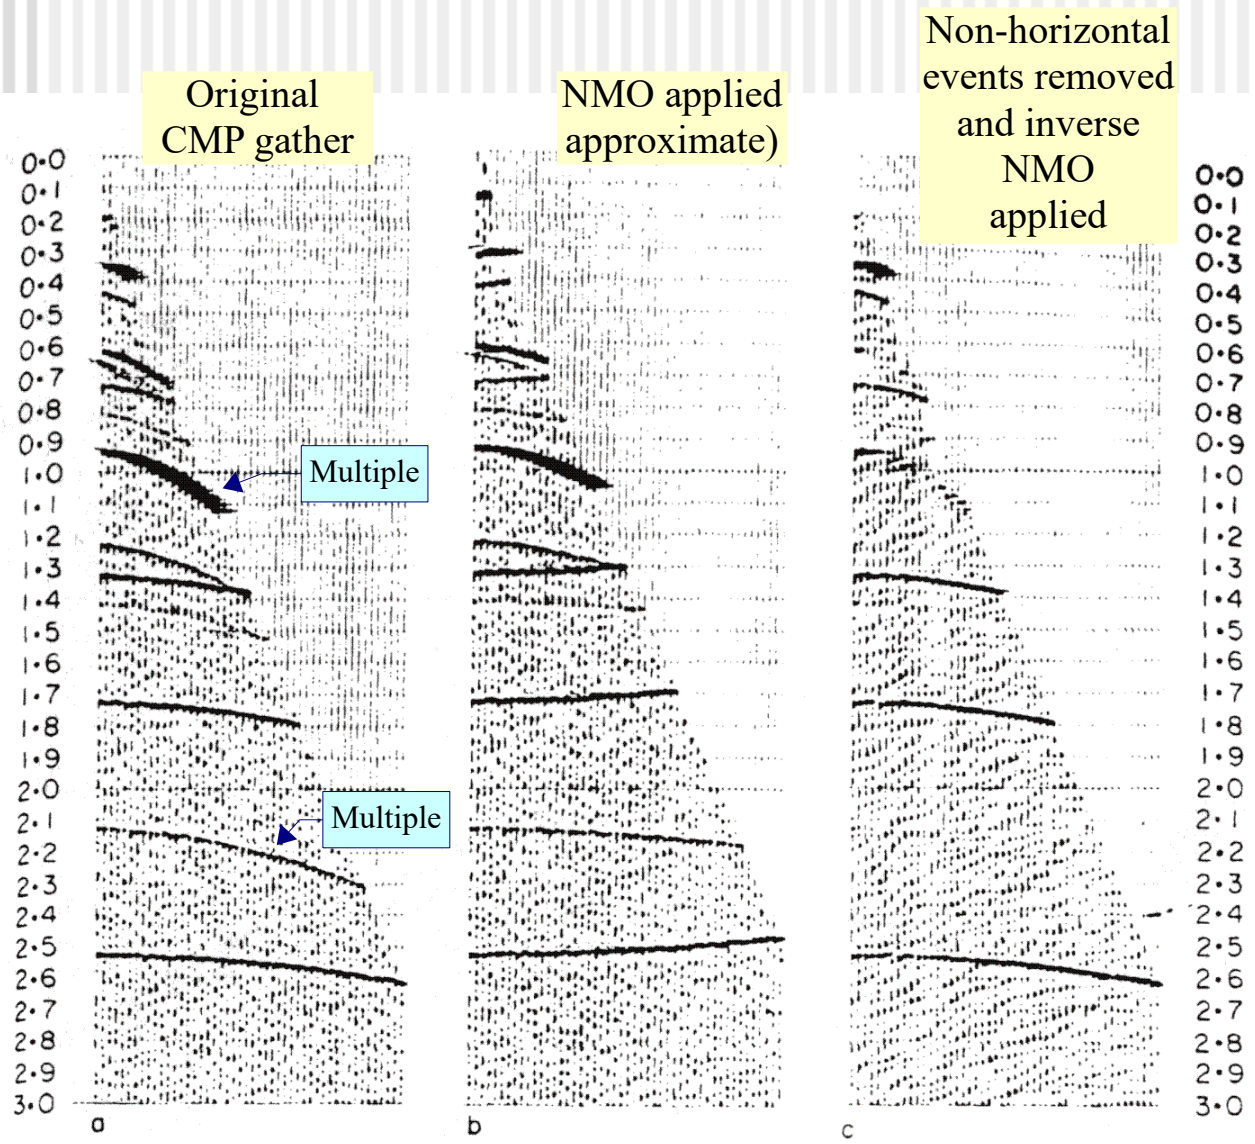

# Migration


- A simplified variant of '*inversion*' (without changing amplitudes)
  - ◆ Inverts 'time section' for true 'depth image'.
- Establishes true positions (AC in plot) and dips ( $\alpha$ ) of reflectors.
- Collapses diffractions.

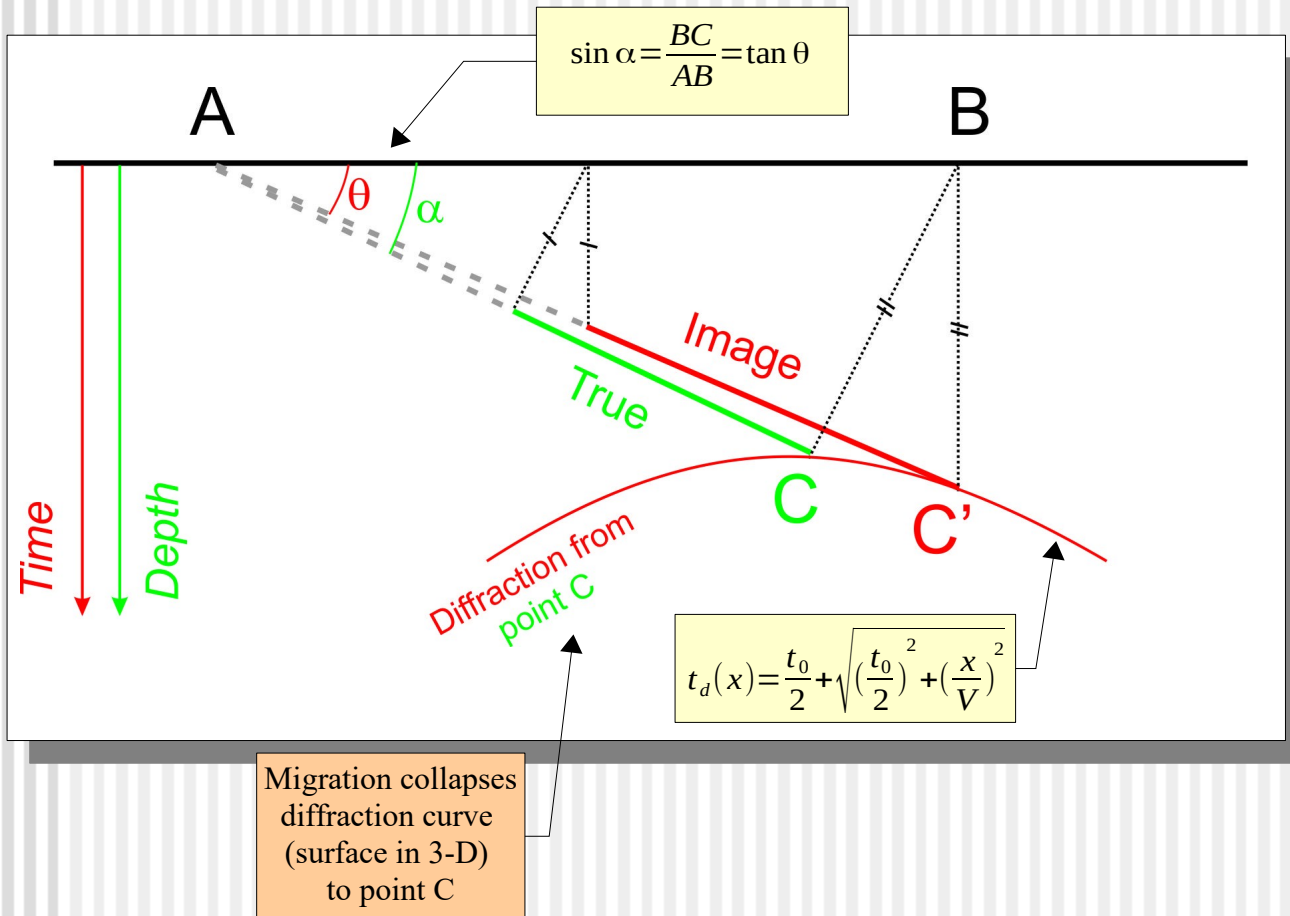




New!

# Example: CMP gathers

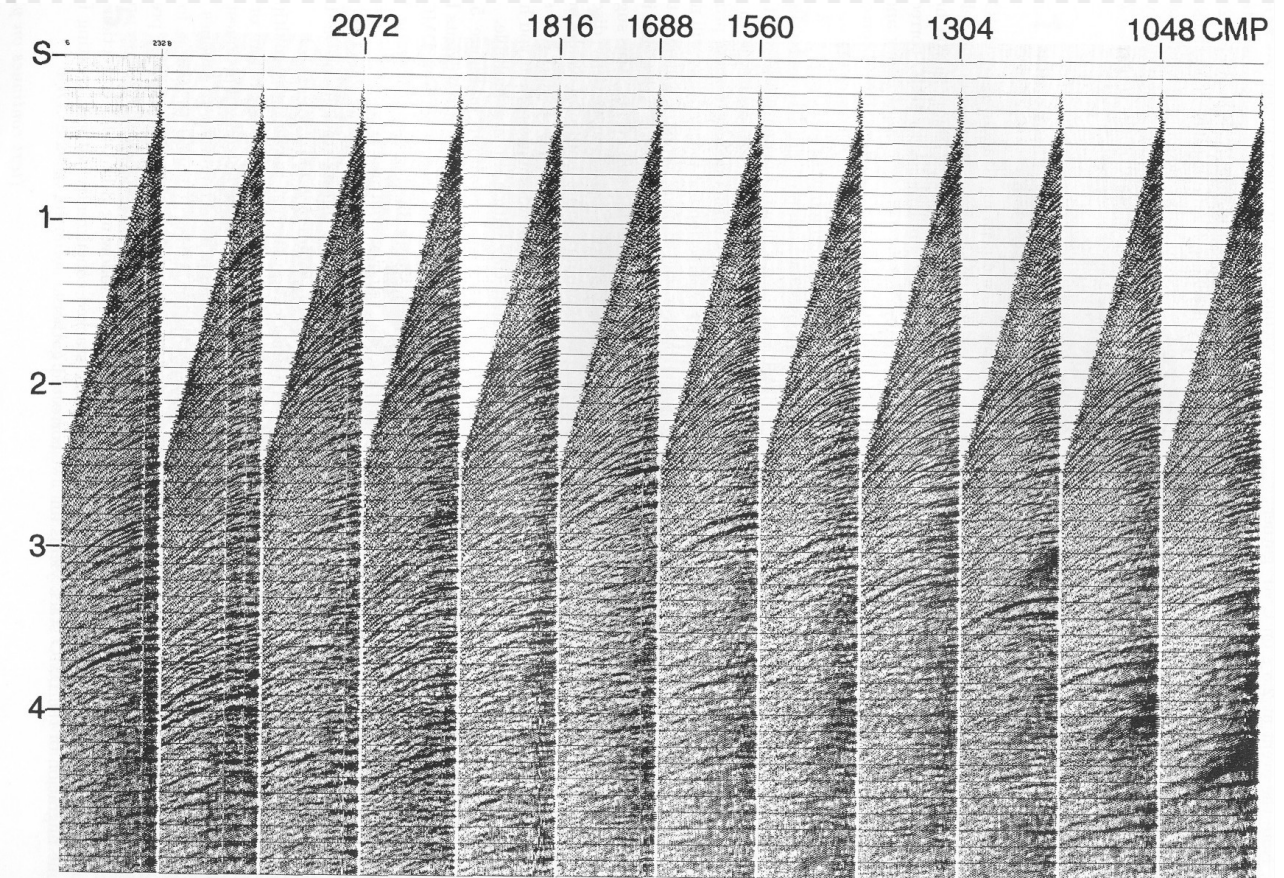


# Example: CMP gathers after NMO correction

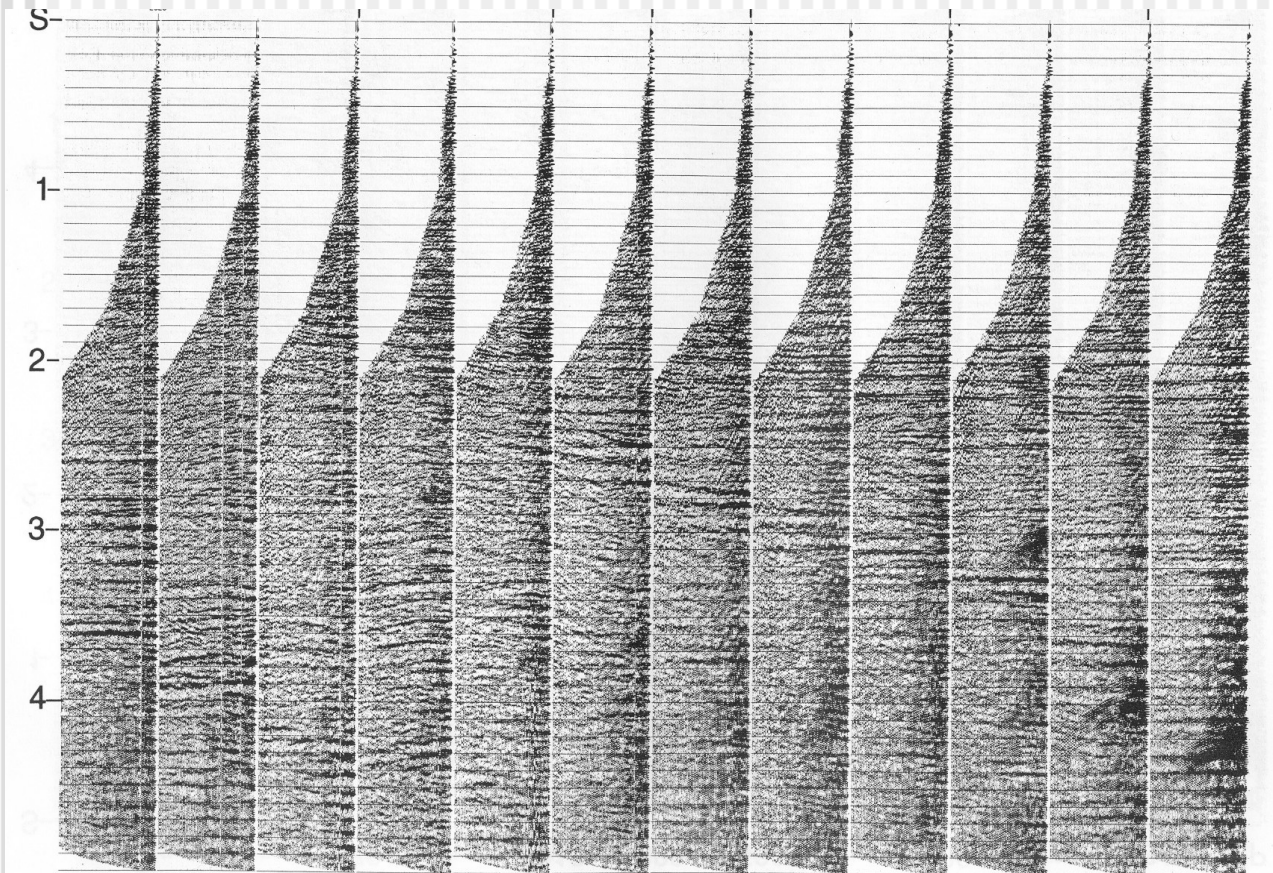

**New!**


# Example:

## CMP gathers after NMO+DMO corrections

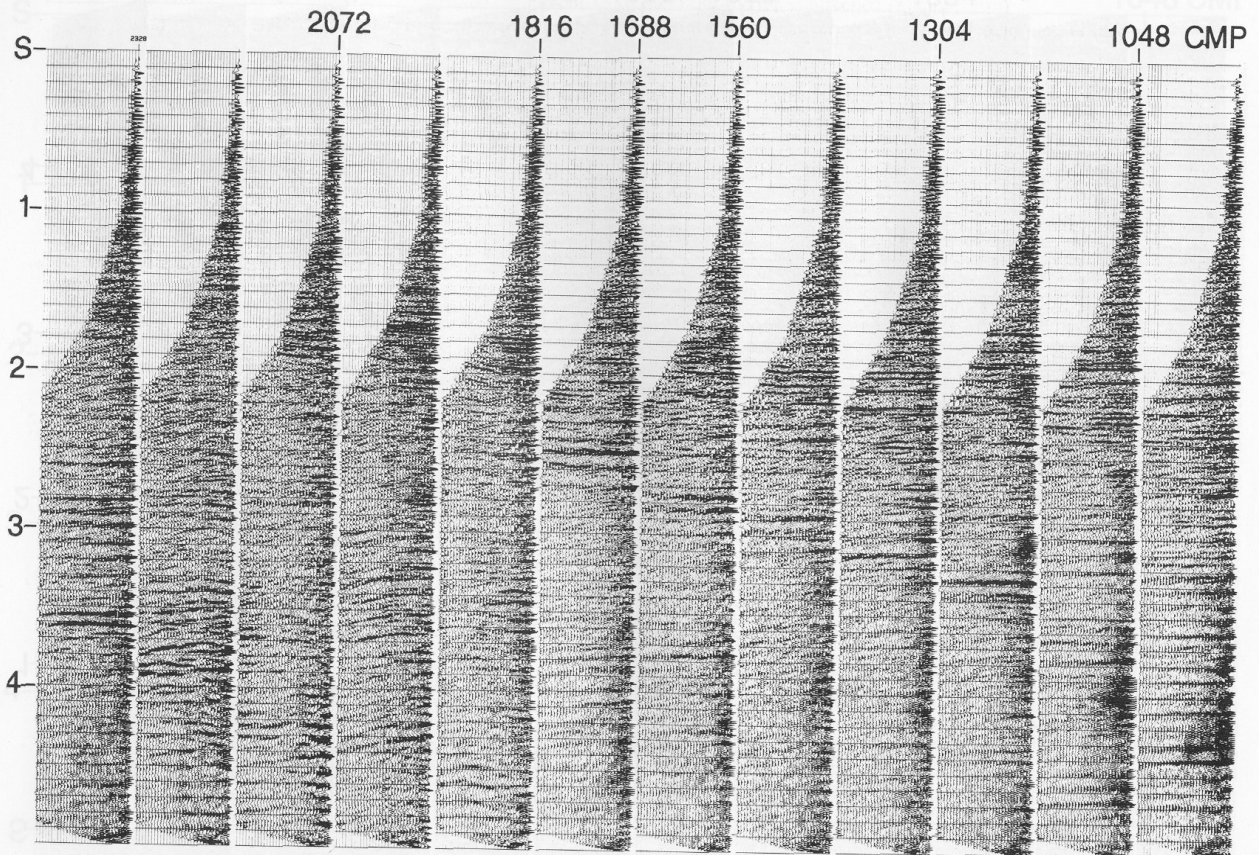

New!

# Example: Velocity analysis

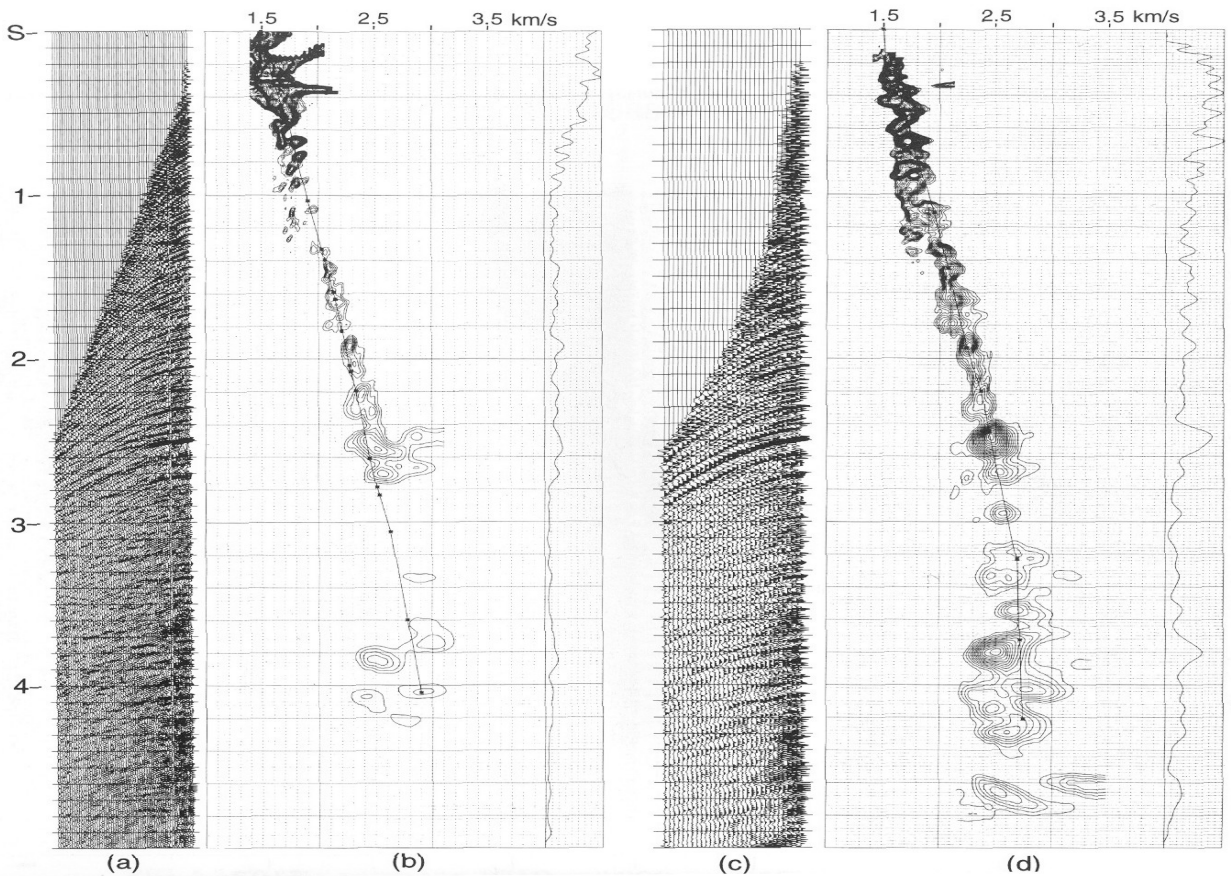


Without DMO

With DMO

**New!**

# Example: NMO(with DMO) stack *Zero-offset section*

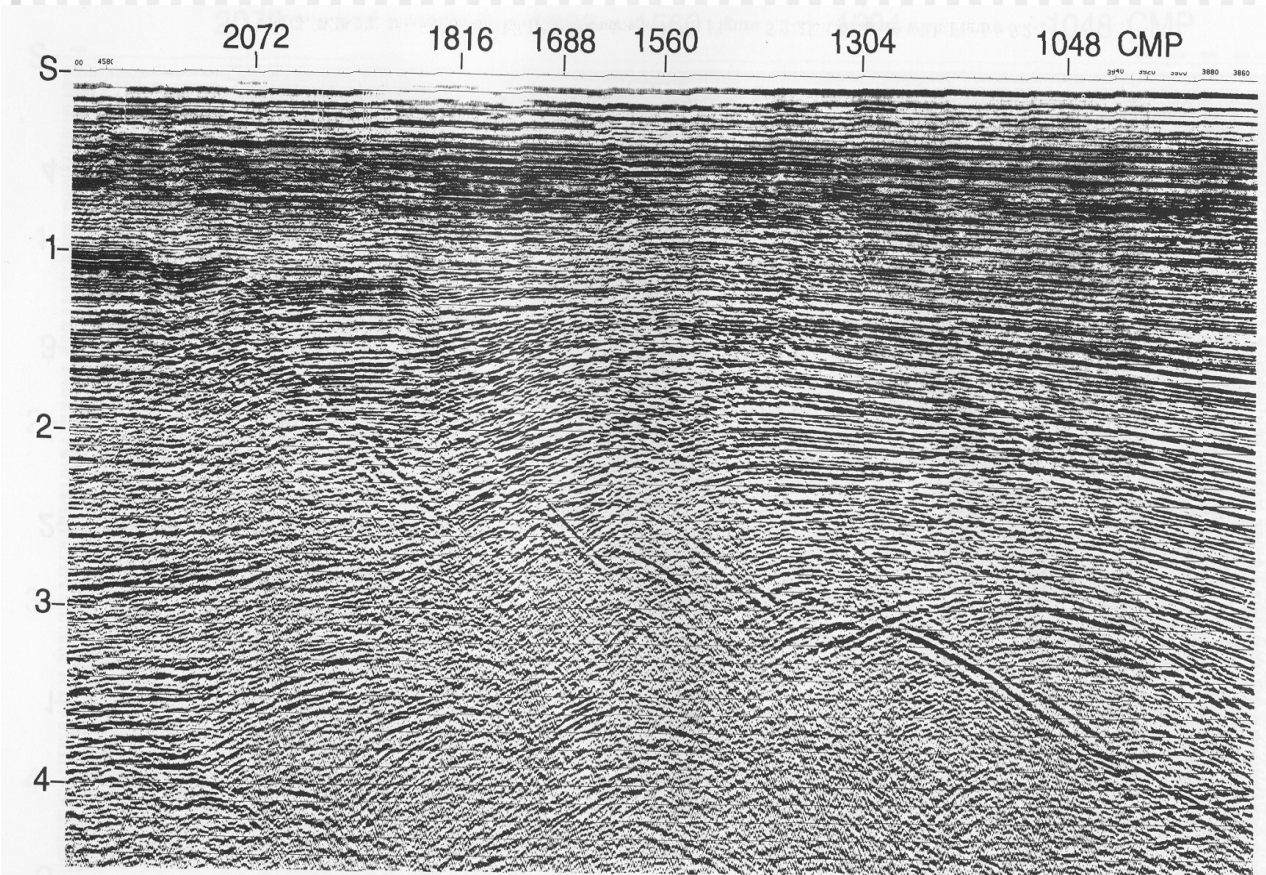

New!

# Example: Final migrated stack

