


# Refraction seismic Method

---

- Field techniques
- Inversion for refractor velocity, depth, and dip
- Delay time
- Interpretation
  - ◆ Basic-formula methods
  - ◆ Delay-time methods
  - ◆ Wavefront reconstruction methods
- Reading:
  - › Sheriff and Geldart, Chapter 11

# Field techniques


- In-line shooting
  - May shoot segments (e.g., C-D, D-E, E-F, etc. below) in order to economize
  - Depending on the target, longer or shorter profiles, with or without recording at shorter offsets

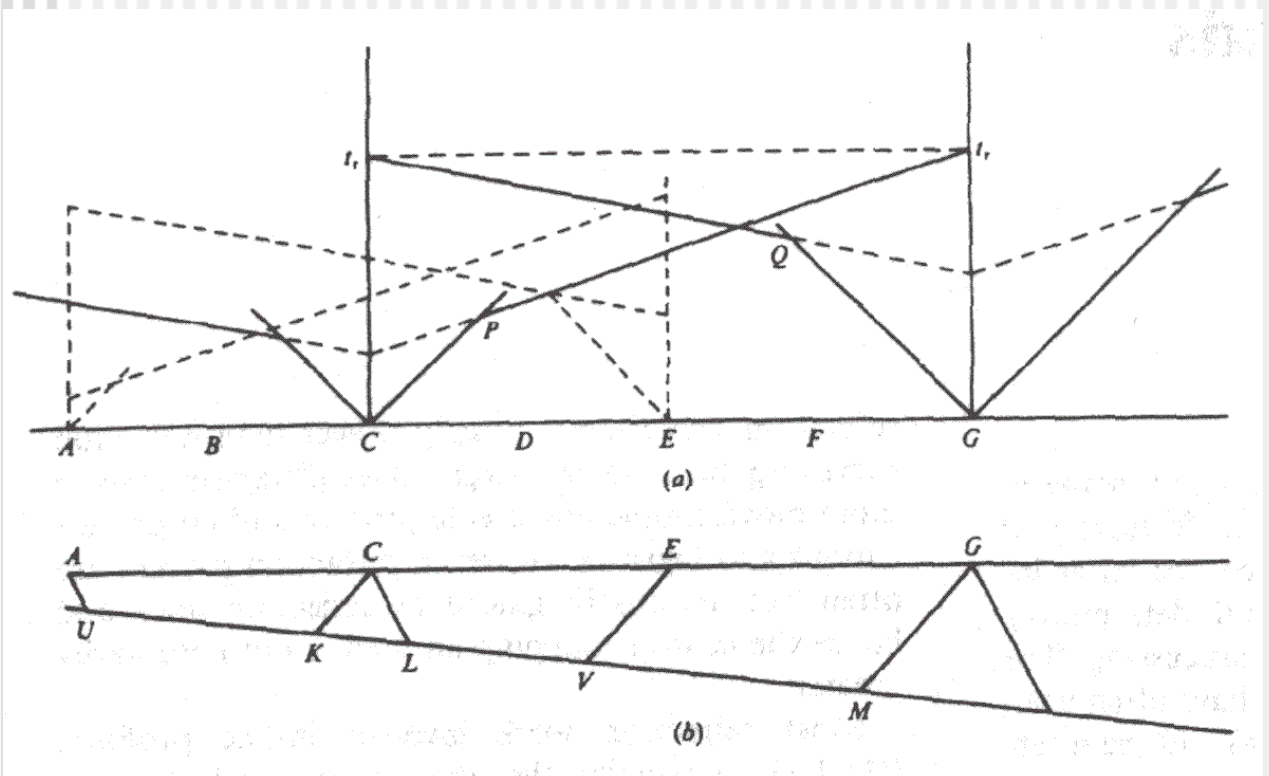

# Refraction Interpretation

## Reversed travel times

- One needs *reversed* recording (in opposite directions) for resolution of dips.
- The *reciprocal times*,  $T_{R'}$ , must be the the same for reversed shots.
- Dipping refractor is indicated by:
  - ◆ Different *apparent velocities* ( $=1/p$ , TTC slopes) in the two directions;
    - determine  $V_2$  and  $\alpha$  (refractor velocity and dip).
  - ◆ Different *intercept times*.
    - determine  $h_d$  and  $h_u$  (interface depths).

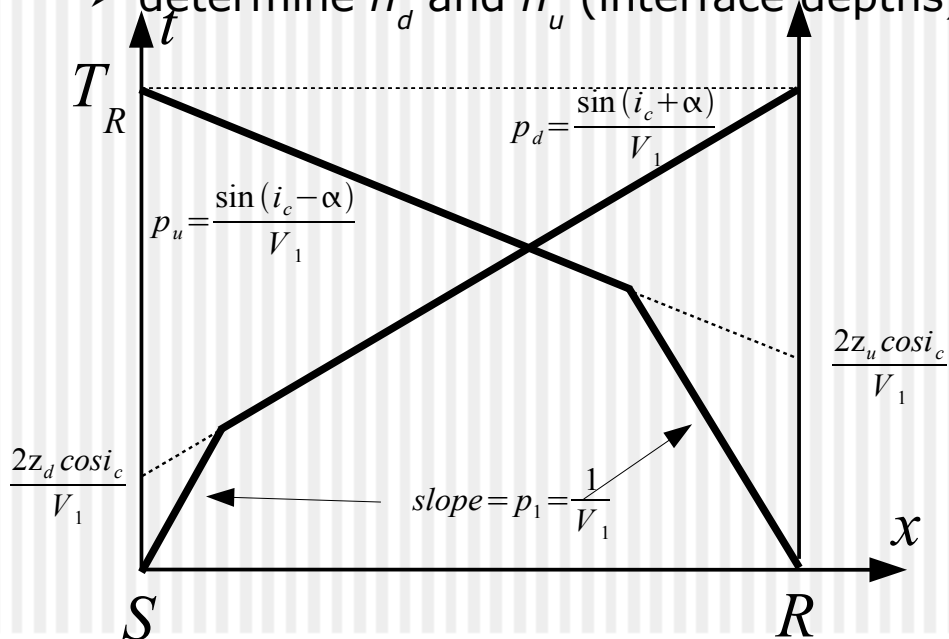

# Determination of Refractor Velocity and Dip

- *Apparent velocity* is  $V_{app} = 1/p$ , where  $p$  is the *ray parameter* (i.e., slope of the travel-time curve).

- ◆ Apparent velocities are measured directly from the observed TTCs;

- ◆  $V_{app} = V_{refractor}$  only in the case of a horizontal layering.

- ◆ For a dipping refractor:

- Down dip:  $V_d = \frac{V_1}{\sin(i_c + \alpha)}$  (*slower than*  $V_1$ );

- Up-dip:  $V_u = \frac{V_1}{\sin(i_c - \alpha)}$  (*faster*).

- From the two reversed apparent velocities,  $i_c$  and  $\alpha$  are determined:

$$i_c + \alpha = \sin^{-1} \frac{V_1}{V_d}, \quad i_c - \alpha = \sin^{-1} \frac{V_1}{V_u}$$

$$i_c = \frac{1}{2} \left( \sin^{-1} \frac{V_1}{V_d} + \sin^{-1} \frac{V_1}{V_u} \right),$$

$$\alpha = \frac{1}{2} \left( \sin^{-1} \frac{V_1}{V_d} - \sin^{-1} \frac{V_1}{V_u} \right).$$

- From  $i_c$ , the refractor velocity is:


$$V_2 = \frac{V_1}{\sin i_c}$$

# Determination of Refractor Depth

- From the *intercept times*,  $t_d$  and  $t_u$ , *refractor depth* is determined:

$$h_d = \frac{V_1 t_d}{2 \cos i_c}$$

$$h_u = \frac{V_1 t_u}{2 \cos i_c}$$

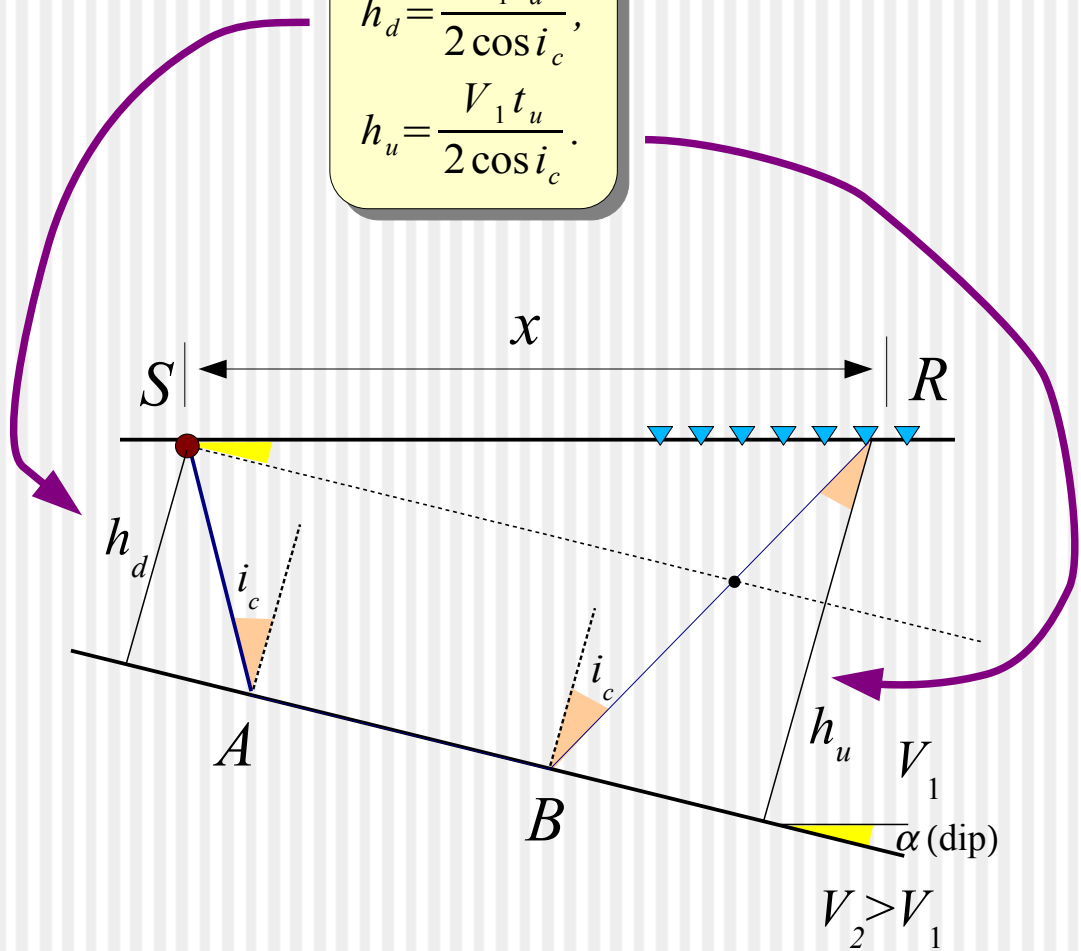

# Delay time

(the basis for most refraction interpretation techniques)

- Consider a nearly horizontal, shallow interface with strong velocity contrast (a typical case for **weathering layer**).
  - In this case, we can separate the times associated with the source and receiver vicinities:  $t_{SR} = t_{SX} + t_{XR}$ .

- Relate the time  $t_{SX}$  to a time along the refractor,  $t_{BX}$ :


$$t_{SX} = t_{SA} - t_{BA} + t_{BX} = t_{S\text{Delay}} + x/V_2$$

Note that  $V_2 = V_1 / \sin i_c$

$$t_{S\text{Delay}} = \frac{SA}{V_1} - \frac{BA}{V_2} = \frac{h_s}{V_1 \cos i_c} - \frac{h_s \tan i_c}{V_2} = \frac{h_s}{V_1 \cos i_c} (1 - \sin^2 i_c) = \frac{h_s \cos i_c}{V_1}$$


- Thus, the source and receiver **delay times** are:

$$t_{S,R\text{Delay}} = \frac{h_{s,r} \cos i_c}{V_1} \quad \text{and} \quad t_{SR} = t_{S\text{Delay}} + t_{R\text{Delay}} + \frac{SR}{V_2}$$

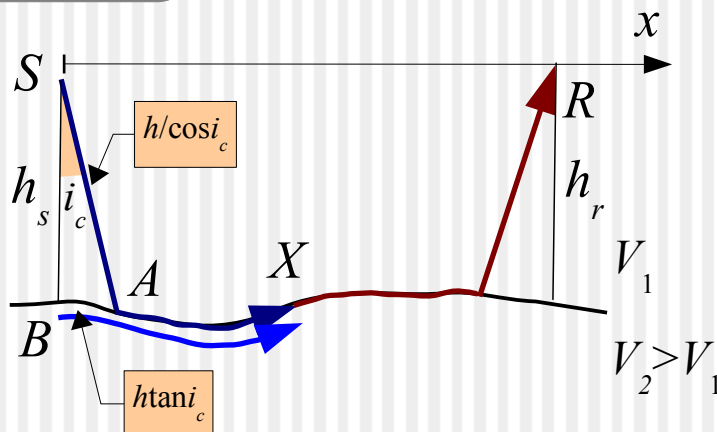

# Basic-formula interpretation (*The ABC method*)

- Combine the refraction times recorded along A-C, B-C, and A-B:

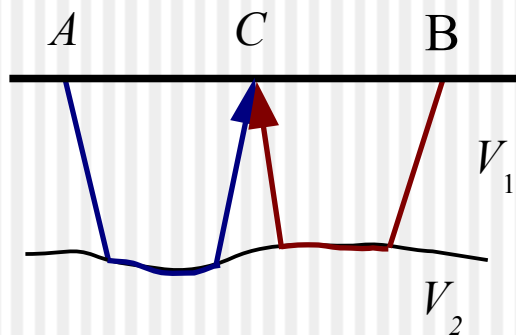

$$t_{AC} + t_{CB} - t_{AB} \approx 2t_{\text{Delay}(C)} = \frac{2h_C \cos i_c}{V_1}$$

- Therefore:

$$h_C \approx \frac{V_1}{2 \cos i_c} (t_{AC} + t_{CB} - t_{AB}).$$

- Note the typical time-to-depth conversion factor:

$$\frac{V_1}{\cos i_c} = \frac{V_1}{\sqrt{1 - \sin^2 i_c}} = \frac{V_1 V_2}{\sqrt{V_2^2 - V_1^2}}.$$


# Delay-time methods

## *Barry's method*

- Note that the ABC formula applies to the intercept times, with *any value* of  $V_2$  assumed:

$$t^{int} = t - \frac{x}{V_2}$$

$$t_{AC}^{int} + t_{CB}^{int} - t_{AB}^{int} \approx 2 t_{Delay(C)} = \frac{2h_C \cos i_c}{V_1}$$

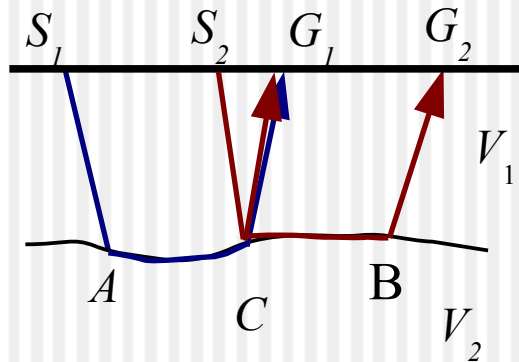

- Thus the shot delay at C is:

$$t_{Delay(C)} \approx \frac{1}{2} (t_{CB}^{int} + t_{AC}^{int} - t_{AB}^{int})$$

- And geophone delay at B:


$$t_{Delay(B)} = t_{CB}^{int} - t_{Delay(C)} \approx \frac{1}{2} (t_{CB}^{int} - t_{AC}^{int} + t_{AB}^{int})$$



# Delay-time methods

## *Barry's method*


- 1) Plot the time-reduced travel times.
- 2) Calculate the geophone delay times.
- 3) Plot the delay times at the "offset geophone" positions.
- 4) Adjust  $V_2$  until the lines from reversed profiles are parallel.

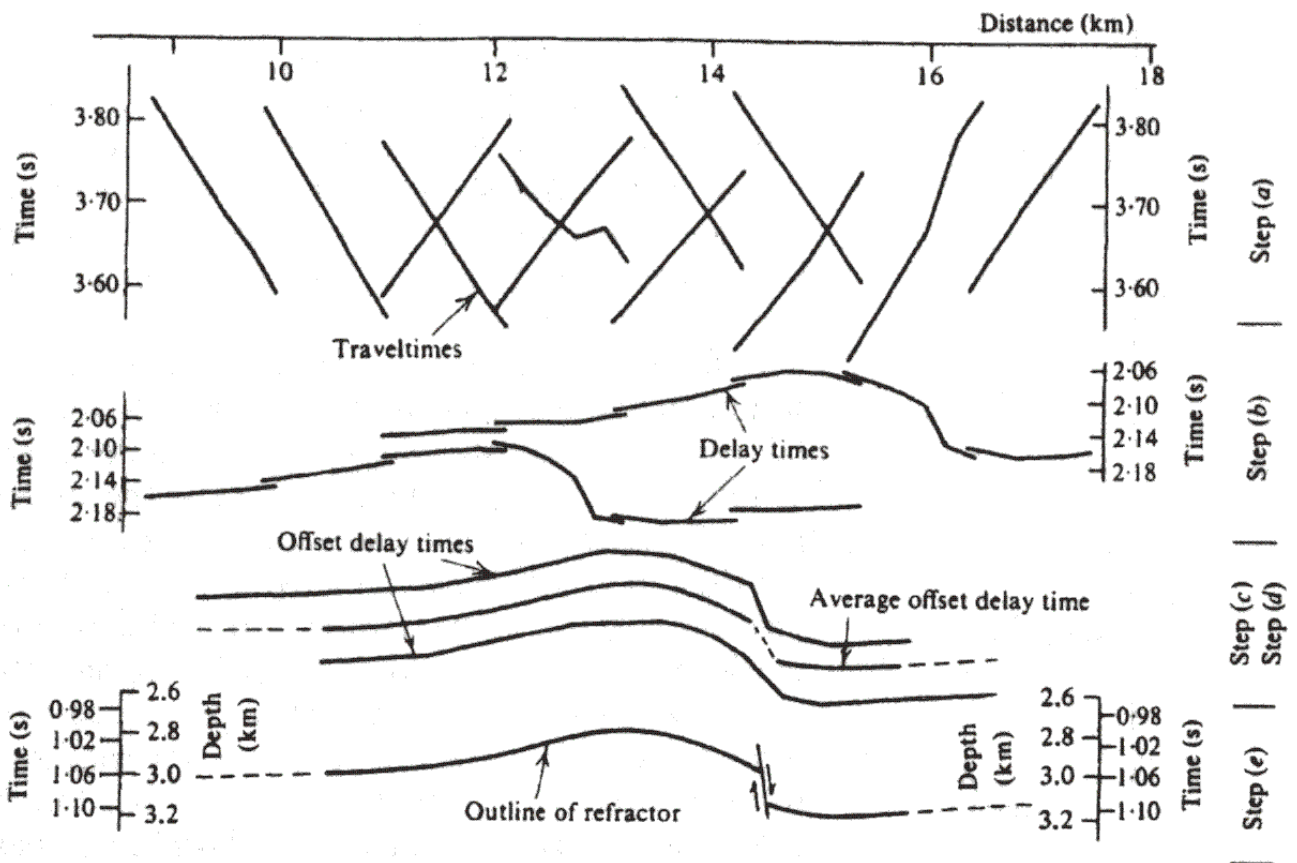

# Delay-time methods

## *Wyrobek's method*

A series of unreversed profiles is used

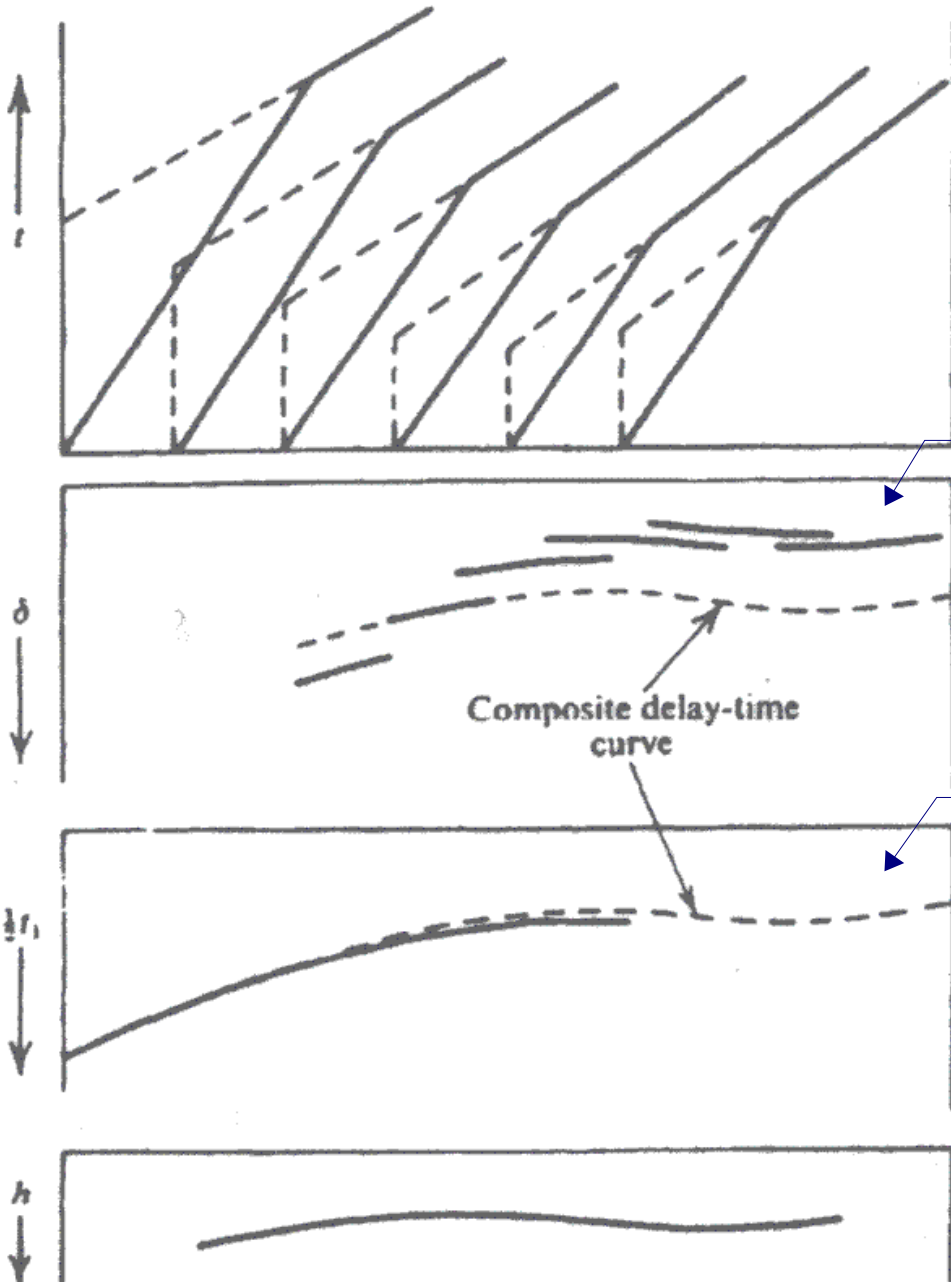

**Step (a)**  
(traveltimes)

For each geophone the various shots form an equivalent of a reversed profile. The delay times are combined into a composite delay-time curve

**Step (b)**  
(total delay times)

With properly adjusted  $V_2$ , the composite delay times match the half-intercept times



**Step (c)**  
(half-intercept times)

**Step (d)**  
(depth)

# Plus-Minus Method (Hagedoorn)

- Assume that we have recorded two headwaves in the opposite directions, and have estimated the velocity of the overburden,  $V_1$ .

How can we map the refracting interface?

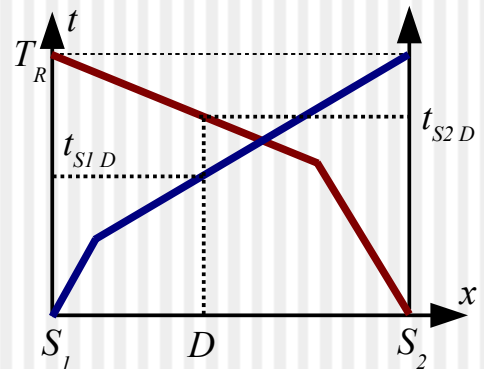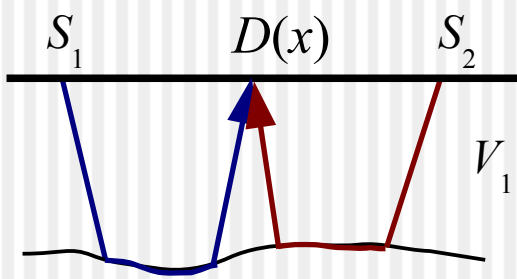

- Solution:

- Profile  $S_1 \rightarrow S_2$ :  $t_{S_1D} = \frac{x}{V_2} + t_{S_1} + t_D$
- Profile  $S_2 \rightarrow S_1$ :  $t_{S_2D} = \frac{(S_1 S_2 - x)}{V_2} + t_{S_2} + t_D$

Form PLUS travel-time:

$$t_{PLUS} = t_{S_1D} + t_{S_2D} = \frac{S_1 S_2}{V_2} + t_{S_1} + t_{S_2} + 2t_D = t_{S_1 S_2} + 2t_D$$

Hence:  $t_D = \frac{1}{2}(t_{PLUS} - t_{S_1 S_2})$

- To determine  $i_c$  (and depth), still need to find  $V_2$ .

# Plus-Minus Method (Continued)

- To determine  $V_2$ :



- ◆ Form MINUS travel-time:

this is a constant!

$$t_{MINUS} = t_{S_1 D} - t_{S_2 D} = \frac{2x}{V_2} - \frac{S_1 S_2}{V_2} + t_{S_1} - t_{S_2}$$



Hence:  $slope[t_{MINUS}(x)] = \frac{2}{V_2}$

- ◆ The slope is usually estimated by using the *Least Squares method*.
- Drawback of this method – averaging over the pre-critical region.

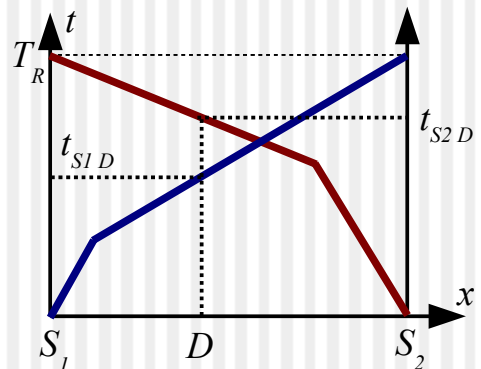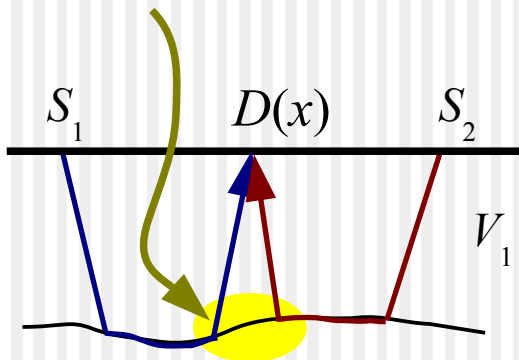

# Generalized Reciprocal Method (GRM)

- Introduces offsets ('XY') in travel-time readings in the forward and reverse shots;
  - ◆ so that the imaging is targeted on a compact interface region.
- Proceeds as the plus-minus method;
- Determines the 'optimal' XY:
  - 1) Corresponding to the most linear *velocity analysis function*;
  - 2) Corresponding to the *most detail* of the refractor.

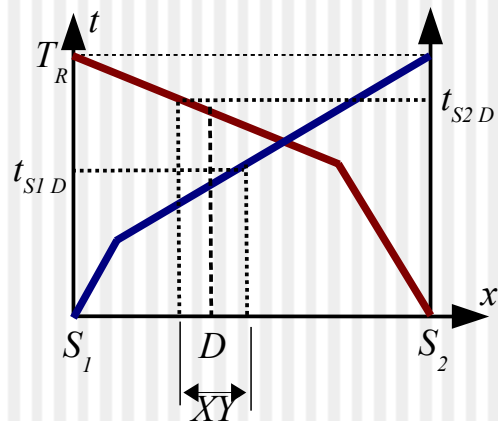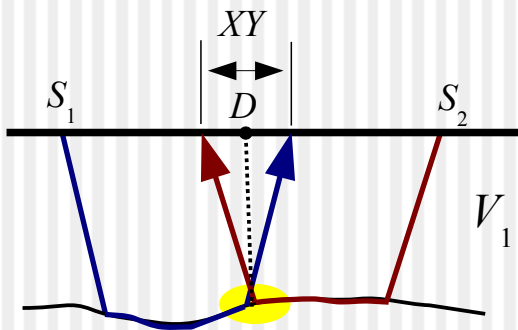

- The *velocity analysis function*:

$$t_V = \frac{1}{2}(t_{S_1D} - t_{S_2D} + t_{S_1S_2}),$$

should be linear, slope =  $1/V_2$ ;

- The *time-depth function*:


$$t_D = \frac{1}{2}(t_{S_1D} + t_{S_2D} - t_{S_1S_2} - \frac{XY}{V_2}).$$

this is related to the desired image:

$$h_D = \frac{t_D V_1 V_2}{\sqrt{V_2^2 - V_1^2}}$$

# Wavefront reconstruction methods

- Head-wave wavefronts can be propagated back into the subsurface...

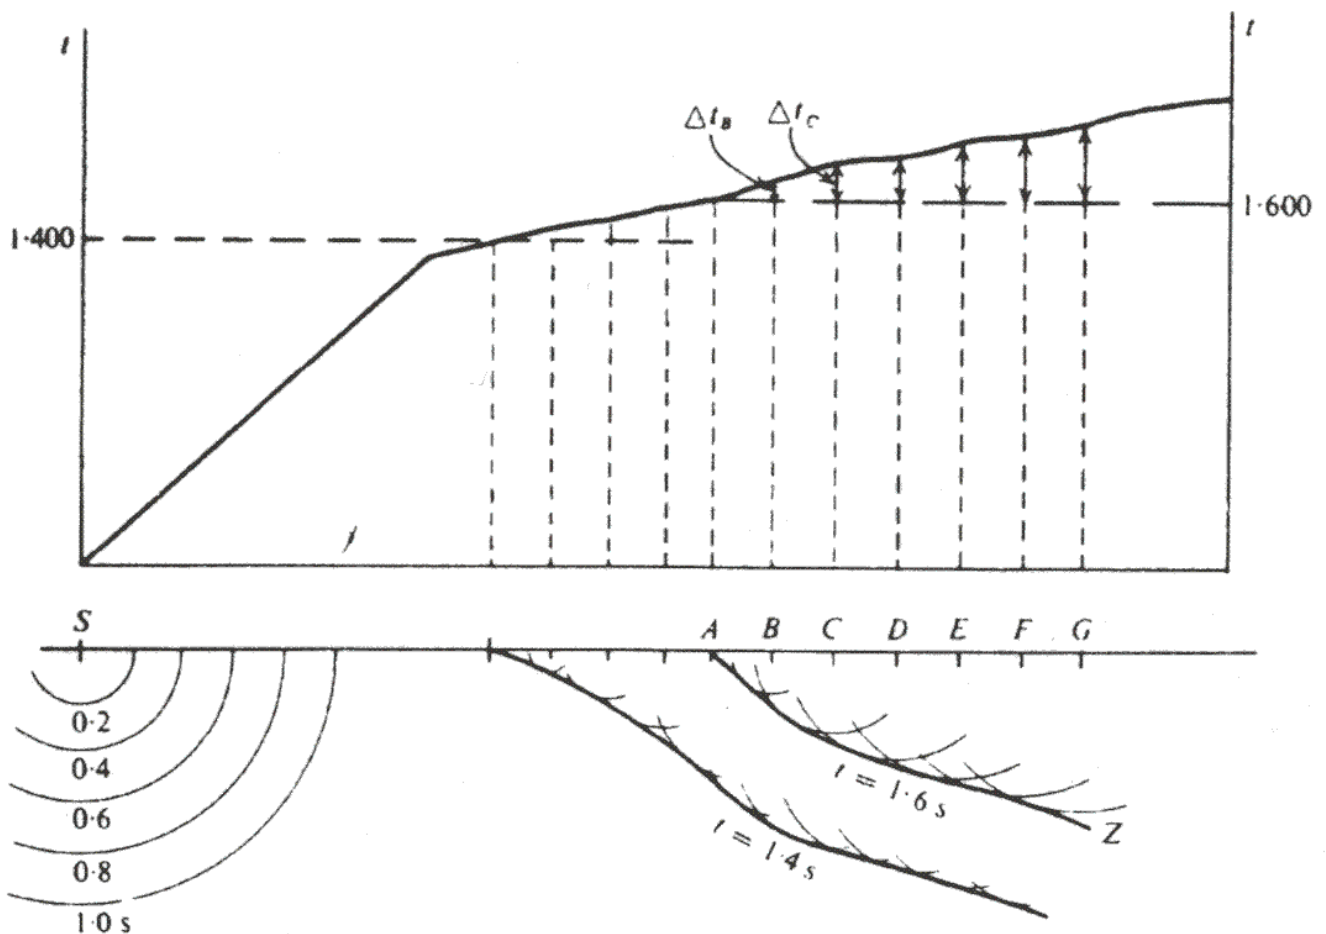

# Wavefront reconstruction methods

- ... and combined to form an image of the refractor:
  - Refractor is the locus of  $(x, z)$  points such that:

$$t_{Forward}(x, z) + t_{Reversed}(x, z) = T_{Reciprocal}$$

- Note the similarity with the PLUS-MINUS method!

